

## Beltram Edge Tool Supply, Inc.

Bid Contact **Rita Nurdin**  
**rcrocker@beltram.com**  
**Ph 813-239-1136**  
**Fax 813-985-6080**

Address **6800 N. Florida Avenue**  
**Tampa,, FL 33604**

Qualifications **FL-EVERIFY PP-DRUGFREE PP-EQUAL PP-LBTR PP-LOCAL PP-SCRUTINIZED PP-SWORN PP-VENDORINFO PP-VOSB PP-W9**

Bid Notes **PLEASE NOTE: WE WILL MAKE EVERY EFFORT TO MEET YOUR 30 DAY DELIVERY REQUIREMENT BY WORKING CLOSELY WITH THE MANUFACTURERS. HOWEVER, WE CAN NOT ALWAYS GUARANTEE A 30 DAY DELIVERY TIME FRAME DURING THESE PANDEMIC TIMES. ALL MATERIALS WILL BE CONSOLIDATED AT OUR WAREHOUSE UPON RECEIPT OF THE PURCHASE ORDER AND A MUTAL DELIVERY SCHEDULE WILL BE ARRANGED. QUOTE IS BASED ON ONE DELIVERY TO ONE LOCATION.**

Item #	Line Item	Notes	Unit Price	Qty/Unit	Attch. Docs
AD-21-04--01-01	STEAM TABLE PAN, STAINLESS STEEL	Supplier Product Code: 88002931	First Offer - \$8.94	96 / each	\$858.24 Y
AD-21-04--01-02	STEAM TABLE PAN, STAINLESS STEEL	Supplier Product Code: 88004931	First Offer - \$12.31	96 / each	\$1,181.76 Y
AD-21-04--01-03	BUN/SHEET PAN	Supplier Product Code: 5324	First Offer - \$7.28	72 / each	\$524.16 Y
AD-21-04--01-04	HEATED HOLDING PROOFING CABINET, MOBILE	Supplier Product Code: C539-CFS-4	First Offer - \$2,439.66	5 / each	\$12,198.30 Y
AD-21-04--01-05	NESTING PAN RACK	Supplier Product Code: NR-20-X	First Offer - \$331.75	4 / each	\$1,327.00 Y
AD-21-04--01-06	BUSSING UTILITY TRANSPORT CART	Supplier Product Code: FG335588PLAT	First Offer - \$360.91	4 / each	\$1,443.64 Y
AD-21-04--01-07	BUSSING UTILITY TRANSPORT CART	Supplier Product Code: FG452088BLA	First Offer - \$222.48	1 / each	\$222.48 Y
AD-21-04--01-08	INSULATED FOOD CARRIER	Supplier Product Code: PC300N59	First Offer - \$242.32	3 / each	\$726.96 Y
AD-21-04--01-09	PAN CARRIER DOLLY	Supplier Product Code: DL300R03	First Offer - \$151.96	1 / each	\$151.96 Y
AD-21-04--01-10	TILTING SKILLET BRAISING PAN, GAS	Supplier Product Code: VG40	First Offer - \$17,175.09	1 / each	\$17,175.09 Y

AD-21-04--01-11	GAS CONNECTOR HOSE	<b>Supplier Product Code:</b> HG-4D-48K	<b>First Offer - \$129.91</b>	1 / each	<b>\$129.91</b>	<b>Y</b>
AD-21-04--01-12	TRUCK, PLATFORM	<b>Supplier Product Code:</b> PT306096  <b>Supplier Notes:</b> ALTERNATE ITEM NEW AGE PT3060P6 REFER TO ATTACHED SPECS	<b>First Offer - \$759.68</b>	2 / each	<b>\$1,519.36</b>	<b>Y</b>
AD-21-04--01-13	WATER FOUNTAIN/BOTTLE REFILLING STATION	<b>Supplier Product Code:</b> 761218	<b>First Offer - \$1,152.44</b>	1 / each	<b>\$1,152.44</b>	<b>Y</b>
AD-21-04--01-14	ANTI-FATIGUE FLOOR MAT	<b>Supplier Product Code:</b> 5000-R35	<b>First Offer - \$143.91</b>	2 / each	<b>\$287.82</b>	<b>Y</b>
AD-21-04--01-15	REACH-IN FREEZER	<b>Supplier Product Code:</b> M3F47-2-N	<b>First Offer - \$4,064.89</b>	1 / each	<b>\$4,064.89</b>	<b>Y</b>
AD-21-04--01-16	COMBI OVEN, GAS	<b>Supplier Product Code:</b> ABC7G-NAT	<b>First Offer - \$14,496.92</b>	1 / each	<b>\$14,496.92</b>	<b>Y</b>
AD-21-04--01-17	GAS CONNECTOR HOSE KIT / ASSEMBLY	<b>Supplier Product Code:</b> HG-4D-48K	<b>First Offer - \$129.91</b>	1 / each	<b>\$129.91</b>	<b>Y</b>
AD-21-04--01-18	REACH-IN REFRIGERATOR	<b>Supplier Product Code:</b> M3R47-2-N	<b>First Offer - \$3,244.51</b>	1 / each	<b>\$3,244.51</b>	<b>Y</b>
AD-21-04--01-19	CABINET, COOK/HOLD/OVEN	<b>Supplier Product Code:</b> 1000-CH-AL-2DE	<b>First Offer - \$7,901.65</b>	1 / each	<b>\$7,901.65</b>	<b>Y</b>
AD-21-04--01-20	MOBILE HEATED CABINET	<b>Supplier Product Code:</b> 1000-HH-SS-2DE	<b>First Offer - \$4,267.15</b>	1 / each	<b>\$4,267.15</b>	<b>Y Y</b>
					<b>Supplier Total</b>	<b>\$73,004.15</b>

**Beltram Edge Tool Supply, Inc.**

Item: **MOBILE HEATED CABINET**

**Attachments**

City Of Pembroke Pines Charter Schools Bid AS 21 04.pdf








## Quote




04/19/2021



<b>To:</b> City Of Pembroke Pines 8300 South Palm Dr Pembroke Pines, FL 33025 (954) 518-9020 (Contact)	<b>Project:</b> City Of Pembroke Pines Charter Schools Bid #AS-21-04	<b>From:</b> Beltram Edge Tool Supply, Inc. Rita Croker 11101 N 46th Street Tampa, FL 33617 (813) 985-8870 x 1302 (727) 491-5547 Direct Line (Contact)
--	--	---

*Thank you for considering Beltram Foodservice Group  
for all your foodservice supplies.*


Item	Qty	Description	Sell	Sell Total
1	96 ea	<b>STEAM TABLE PAN, STAINLESS STEEL</b> ABC Procurement Model No. 88002931 Packed 6 ea Food Pan, full, 2-1/2" deep, 25 gauge stainless steel	8.94	858.24
2	96 ea	<b>STEAM TABLE PAN, STAINLESS STEEL</b> ABC Procurement Model No. 88004931 Packed 6 ea Food Pan, full, 4" deep, 25 gauge stainless steel	12.31	1,181.76
3	72 ea	<b>BUN / SHEET PAN</b> ABC Procurement Model No. 5324 Packed 12 ea Sheet Pan, full size, 18" x 26" x 1", 18 gauge aluminum	7.28	524.16
4	5 ea	<b>HEATED HOLDING PROOFING CABINET, MOBILE</b> Metro Model No. C539-CFS-4 C5™ 3 Series Heated Holding & Proofing Cabinet, with Red Insulation Armour™, mobile, full height, insulated cabinet & door, removable bottom mount control module, thermostat to 200°F, fixed wire slides on 3" centers (18) 18" x 26" or (34) 12" x 20" x 2-1/2" pan capacity, 5" casters (2 with brakes), aluminum, 120v/60/1-ph, 2000 watts, 16.7 amps, NEMA 5-20P, cULus, NSF  5 ea 1 year warranty against manufacturing defects	2,439.66	12,198.30
5	4 ea	<b>NESTING PAN RACK</b> Advance Tabco Model No. NR-20-X Special Value Rack, mobile pan, full height, nesting design, open sides, with angle tray guides on 3" centers, capacity 20 - 18" x 26" sheet pans or 40 - half-size pans, all-welded aluminum construction, front loading, 69-1/4" high	331.75	1,327.00
6	4 cs	<b>BUSSING UTILITY TRANSPORT CART</b>	360.91	1,443.64

Item	Qty	Description	Sell	Sell Total
		Rubbermaid Commercial Products Model No. FG335588PLAT Utility Cart, 31"L x 18"W x 37-1/2"H, (3) shelves, smooth surface, handles, enclosed ends, plastic construction, (4) casters, assembly required, platinum, NSF, HACCP, Made in USA		
7	1 cs	<b>BUSSING UTILITY TRANSPORT CART</b> Rubbermaid Commercial Products Model No. FG452088BLA Material Handling/Heavy Duty Utility Cart, 44"L x 25-1/4"W x 39"H, 500 lb. total capacity, (2) lipped shelves, open base, polypropylene, (4) 5" thermoplastic rubber (TPR) casters, assembly required, black, Made in USA	222.48	222.48
				
8	3 ea	<b>INSULATED FOOD CARRIER</b> Carlisle Model No. PC300N59 Cateraide™ Food Carrier, end loader, individual tracks, holds (8) combinations of 6", 4" & 2-1/2" deep food pans, or (5) 2-1/2" deep food pans, insulated, stain & scratch-resistant, heat-resistant to 200°F, automatic self-venting system, molded-in handles, stackable, polyethylene, slate blue, NSF, Made in USA	242.32	726.96
				
9	1 ea	<b>FOOD CARRIER DOLLY</b> Carlisle Model No. DL300R03 Cateraide™ Pan Carrier Dolly, platform without handle, holds up to (2) PC300N end loaders or any Cateraide™ top loader, 4" heavy-duty non-marking swivel casters, polyethylene, black, NSF, Made in USA, BPA Free	151.96	151.96
				
10	1 ea	<b>TILTING SKILLET BRAISING PAN, GAS</b> Vulcan Model No. VG40 Braising Pan, Gas, 40-gallon capacity, 46" wide open base, manual tilt, 9" deep stainless steel pan with gallon markings, pouring lip & removable strainer, spring assist cover with drip edge, pan holder, solid state control, includes L faucet bracket, electric ignition, 12" stainless steel legs with adjustable flanged feet, 120,000 BTU, CSA Flame, CSA Star, UL EPH Classified	16,334.79	16,334.79
				
	1 ea	NOTE: Item qualifies for a no charge equipment check out after the unit has been fully installed & put into service. contact your Vulcan Representative for more details		
	1 ea	1 year limited parts & labor warranty, standard		
	1 ea	K-12 School Nutrition extended warranty extends the warranty for 12 months beyond the 12 month Original Equipment Warranty, not to exceed 24 months from date of installation		
	1 ea	Natural gas (specify elevation if over 2,000 ft.)		
	1 ea	NOTE: Elevation kits are field installed		
	1 ea	120v/60/1-ph, 9.0 amps, cord & plug, standard		
	1 ea	DBPTYTS WSHDWN DOUBLE Pantry Deck Mount Faucet, with backflow preventer, 16" add-on faucet, washdown hose, wall hook, NSF & Lead Reduction Compliant (Note: water connection required)	840.30	840.30
		***		
		<b>INCLUDES INSIDE DELIVERY, UNCRATE &amp; SET-IN-PLACE DISPOSAL OF EXISTING UNIT</b>		

Item	Qty	Description	Sell	Sell Total
<b>CONNECTION IS BY OTHERS</b>				
***				
12	1 kt	<b>GAS CONNECTOR HOSE KIT / ASSEMBLY</b>  T&S Brass Model No. HG-4D-48K Packed 1 kt Safe-T-Link Gas Connector Kit, 3/4" connection, 48"L, stainless steel braid with extruded coating, (1) quick disconnect, (1) street "EL", ball valve, restraining cable adjustable for 3'to 5'	129.91	129.91
13ALT	1 ea	<b>PLATFORM TRUCK</b>  New Age Model No. PT3060P6 Platform Truck, 30"W x 60"L, tread plate deck, 1/8" thick aluminum, removable handle, (4) 6" x 2" polyurethane plate casters (2 swivel, 2 rigid), 2,600 lbs capacity, Made in USA  1 ea Lifetime warranty against rust & corrosion, 5 year workmanship and material defects warranty, standard	759.68	759.68
14	1 ea	<b>WATER REFILLING STATION</b> Global Industrial Model No. 761218 Refrigerated Drinking Fountain with Bottle Filler, Filtered, by Global Industrial™	1,152.44	1,152.44
15	2 ea	<b>ANTI-FATIGUE FLOOR MAT</b>  Cactus Mat Model No. 5000-R35 VIP Red Cloud Anti-Fatigue Mat, 3' x 5', 3/4" thick, closed-cell nitrile textured rubber with drainage holes, tapered safety edge all sides, grease & slip-resistant, for kitchens, cooklines, bars, prep areas, waitress pick-up, assembly lines, & behind counters, lightweight, red	143.91	287.82
16	1 ea	<b>REACH-IN FREEZER</b>  Turbo Air Model No. M3F47-2-N M3 Freezer, reach-in, two-section, 42.1 cu. ft., exterior LED digital thermometer, door open beep, self-diagnostic monitoring system, hot gas condensate system, smart fuzzy defrost, automatic fan motor delays, door pressure release, LED interior lighting, self-cleaning condenser device, (2) hinged solid doors with recessed handle & locks, (6) PE coated wire shelves, stainless steel front & sides (galvanized steel top, bottom & back), aluminum interior with stainless steel floor, top mount self-contained compressor, R290 Hydrocarbon refrigerant, 2/3 HP, 115v/60/1-ph, 6.3 amps, NEMA 5-15P, ETL-Sanitation, cETLus, ENERGY STAR®  1 ea 3 year parts & labor warranty, standard 1 ea Additional 2 year compressor warranty (5 year total), standard 1 ea Self-cleaning condenser device equipped, standard 1 st Caster Set, swivel, locking front wheels, standard	4,064.89	4,064.89
17	1 ea	<b>COMBI OVEN, GAS</b>	12,574.82	12,574.82

Item	Qty	Description	Sell	Sell Total
		Vulcan Model No. ABC7G-NAT Combi Oven/Steamer, natural gas, boilerless, (7) 18" x 26" full size sheet or (14) 12" x 20" full size hotel pan capacity, (3) knobs with LED displays for temperature, timer & humidity, auto-adjustment of humidity with temperature selection, auto-reversing fan with electronic braking system, cool to touch glass door, flashing door light & audible alert, (4) Grab n Go wire racks, stainless steel interior & exterior, 80,000 BTU, 120v/60/1-ph, engineered & assembled in USA, UL EPH Classified, cULus		
	1 ea	NOTE: Item qualifies for a no charge equipment check out after the unit has been fully installed & put into service. contact your Vulcan Representative for more details		
	1 ea	NOTE: Try the ABC controls live at <a href="http://www.vulcanequipment.com/ABC">www.vulcanequipment.com/ABC</a>		
	1 ea	1 year limited parts & labor warranty, standard		
	1 ea	K-12 School Nutrition extended warranty extends the warranty for 12 months beyond the 12 month Original Equipment Warranty, not to exceed 24 months from date of installation		
	1 ea	Filtration System		
	1 ea	NOTE: Water is a customer supplied utility just like Gas & Electric to the equipment. Proper Water Filtration based on customer water quality is essential to meet the equipment water spec requirements. Verify type of filtration needed based on performing a cold water analysis from the customer site. A suitable Water Treatment System & regular filter replacements coupled with routine cleaning/deliming is required.		
	1 ea	CB30K-SYSTEM Single Hollow Carbon Filter System, with 30,000 gallon capacity, for chlorine & chloramine reduction, sediment, bad tastes & odors, total organic compounds, tannins & trihalomethanes, ANSI/NSF 42 & 53	676.03	676.03
	1 ea	Opted out of Reverse Osmosis System		
	1 ea	STAND-ABC/SS Stand, open frame, stainless steel, with adjustable feet, includes: spray hose & drip tray	1,057.23	1,057.23
	1 ea	ABC-CAST Casters, with 2 locking wheels, for use only with STAND-ABC/SS	188.84	188.84
	1 ea	SPRAY-ABC Spray Hose Kit, Provided with ABC Stand or ABC Stacking Kits - includes spray handle, 8 ft. stainless steel braided hose & mounting hardware		
		***		
		<b>INCLUDES INSIDE DELIVERY, UNCRATE &amp; SET-IN-PLACE DISPOSAL OF EXISTING UNIT CONNECTION IS BY OTHERS</b>		
		***		
19	1 kt	<b>GAS CONNECTOR HOSE KIT / ASSEMBLY</b> T&S Brass Model No. HG-4D-48K Packed 1 kt Safe-T-Link Gas Connector Kit, 3/4" connection, 48"L, stainless steel braid with extruded coating, (1) quick disconnect, (1) street "EL", ball valve, restraining cable adjustable for 3'to 5'	129.91	129.91
				

20	1 ea	<b>REACH-IN REFRIGERATOR</b>	3,244.51	3,244.51
----	------	------------------------------	----------	----------

Item	Qty	Description	Sell	Sell Total
		Turbo Air Model No. M3R47-2-N M3 Refrigerator, reach-in, two-section, 42.3 cu. ft. exterior LED digital thermometer, door open beep, self-diagnostic monitoring system, hot gas condensate system, automatic fan motor delays, door pressure release, LED interior lighting, self-cleaning condenser device, (2) hinged solid door with recessed handle & lock, (6) PE coated wire shelves, stainless steel front & sides (galvanized steel top, bottom & back), aluminum interior with stainless steel floor, top mount self-contained compressor, R290 Hydrocarbon refrigerant, 1/3 HP, 115v/60/1-ph, 2.8 amps, NEMA 5-15P, ETL-Sanitation, cETLus, ENERGY STAR®		
	1 ea	3 year parts & labor warranty, standard		
	1 ea	Additional 2 year compressor warranty (5 year total), standard		
	1 ea	Self-cleaning condenser device equipped, standard		
	1 st	Caster Set, swivel, locking front wheels, standard		
21	1 ea	<b>CABINET, COOK / HOLD / OVEN</b> Cres Cor Model No. 1000-CH-AL-2DE Cook-N-Hold Cabinet, mobile, two compartment, radiant, insulated, capacity (16) 18" x 26" angle pan slides on 3" center, (6) wire grids, solid state electronic control, LED digital display, standard controls, cook & hold cycles, field reversible doors, magnetic latches, anti-microbial latches, stainless steel interior, aluminum exterior, (4) 5" swivel casters (2) braked, cCSAus, CSA	7,901.65	7,901.65
	1 ea	Standard Warranty: 1 year labor, 2 years parts. Lifetime warranty on heating elements excluding labor		
	1 ea	208-240v/60/3-ph, 6.0 kW, 20.0 amps, NEMA L15-20P		
22	1 ea	<b>MOBILE HEATED CABINET</b> Cres Cor Model No. 1000-HH-SS-2DE Heated Cabinet, Mobile, two compartment, radiant, insulated, top-mount heater assembly, (16) 18" x 26" or (16) 12" x 20" pan capacity, removable pan slides on 2-3/4" centers, (2) independent standard solid state electronic controls, LED digital displays, field reversible dutch doors, magnetic anti-microbial latches, stainless steel construction, (4) 5" swivel casters (2) with brakes, CSA-Sanitation, cCSAus	4,267.15	4,267.15
	1 ea	Standard Warranty: 1 year labor, 2 years parts warranty		
	1 ea	120v/60/1-ph, 1.8 kW, 15.0 amp, 6' cord, NEMA 5-20P, standard		
	1 ea	Right-hand door swing (top & bottom doors), standard		
<b>Total</b>				<b>72,244.47</b>

\*\*\*PLEASE NOTE: We will make every effort to meet your 30 day delivery requirement by working closely with the manufacturers. However, we can not always guarantee a 30 day delivery time frame during these pandemic times. All material will be consolidated at our warehouse upon receipt of the purchase order and a mutual delivery schedule will be arranged to one shipping location.

Thank you for the opportunity to provide this quote!  
*Purchase orders can be emailed to [purchaseorders@beltram.com](mailto:purchaseorders@beltram.com)*

Acceptance: \_\_\_\_\_ Date: \_\_\_\_\_  
Printed Name: \_\_\_\_\_



We put space to work.

Item # \_\_\_\_\_

Job \_\_\_\_\_

## Metro C5 3 Series Insulation Armour™ Heated Holding and Proofing Cabinets

- **Insulation Armour™:** Patented insulation technology retains heat, saves energy, and provides a cool-to-touch exterior. Durable polymer construction is dent, impact, and stain resistant. Molded-in hand holds create vertical handles for mobile applications.
- **Colors:** Insulation Armour is available in Red, Blue, or Gray standard and in other colors on a promotional basis or upon request.
- **Control:** Three modules are available: Holding, Moisture, and Combination Proof and Hold. All feature an easy-to-read digital thermometer, recessed control dials, a master on/off switch, and power indicator lights. All are removable without tools for easy cleaning, and allow for future upgrades without replacing entire cabinet body.
- **Performance:** All modules provide fast heat-up and recovery through a thermostatically controlled, forced convection system.
- **Sizes:** C5 3 Series cabinets are available in Full Height (71", 1803mm), ¾ Height (59", 1499mm), and ½ Height (44", 1118mm) sizes.
- **Doors:** Solid insulated aluminum or clear polycarbonate doors are available. Full Height cabinets can be configured with full length or dutch-style doors. Clear doors provide visibility of the contents of the cabinet without the heat loss associated with opening the door.
- **Capacity:** Three slide styles provide maximum holding capacity. Choose from Universal Wire, Lip Load, or Fixed Wire.
- **Reliability:** Reliability and durability are designed into every C5. High-quality components provide a long life of worry free use.
- **Power Options:** Choose between standard high wattage or low wattage models based on the specific needs of the application.



**Red Full  
Height  
Dutch  
Clear Doors**



**Blue  
½ Height  
Full Solid  
Door**



**Gray  
¾ Height  
Full Clear  
Door**



**Red  
Full Height  
Dutch Solid  
Doors**



**Blue  
Full Height  
Full Clear  
Door**



### 3 Series Removable Control Modules

- **Holding Module:** Hot holding at higher temperatures without moisture control.
- **Moisture Module:** Hot holding and proofing. Moisture control at any temperature.
- **Combination Module:** Hot holding and proofing. Moisture control at lower temperatures (proofing).

All Metro Catalog Sheets are available on our website: [www.metro.com](http://www.metro.com)



**InterMetro Industries Corporation**  
North Washington Street, Wilkes-Barre, PA 18705  
Product Information. U.S. and Canada: 1.800.992.1776  
Outside U.S. and Canada: [www.metro.com/contactus](http://www.metro.com/contactus)

L03-270  
Printed in U.S.A. Rev. 8/18

Information and specifications are subject to change without notice. Please confirm at time of order.

Copyright © 2018 InterMetro Industries Corp.



**C5 3 Series** Insulation Armour™ Heated Holding and Proofing Cabinets


**13.93**

Job \_\_\_\_\_

# C5 3 Series Insulation Armour™ Heated Holding and Proofing Cabinets



We put space to work.

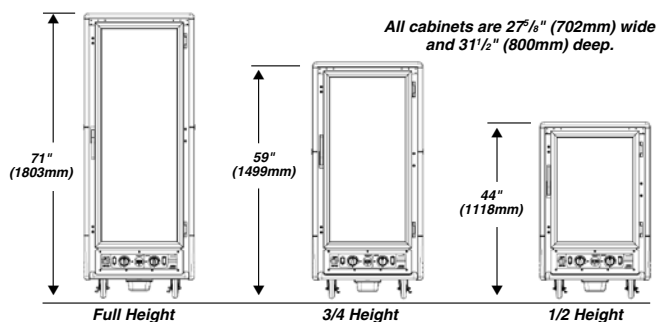

- Cabinet Material:** .063" (1.8mm) aluminum, natural interior with .125" (3.2mm) aluminum chassis.
- Insulation Armour™:** High Density Polyethylene (HDPE).
- Casters:** Four casters with 5" (127mm) donut neoprene wheel, double ball bearing swivel, ball bearing axel, nickel plated, two with brake.
- Solid Doors:** Fully insulated with 1" (25.4mm) fiberglass, double panel .063" (1.8mm) aluminum, brushed exterior, natural interior.
- Clear Doors:** Extruded aluminum powder coated frame with .090" (2.3mm) polycarbonate window.
- Hinges:** Field reversible, double hinged, 180° swing, with long-life nylon bearings.
- Gaskets:** High temperature, door mounted, Santoprene gaskets.
- Latches:** Polymer high-strength magnetic pull latch with lever-action release.
- Hand Holds:** Molded into the Insulation Armour™ on all four corners.
- Universal Slides:** 1/4" (6.4mm) dia. nickel-chrome electroplated wire, adjustable on 1 1/2" (38mm) increments.
- Lip Load Slides:** 1 1/2"x1 1/2"x.063" (38x38x1.8mm) extruded aluminum channel slides, 1 1/2" (38mm) fixed spacing.
- Fixed Wire Slides:** 1/4" (6.4mm) dia. nickel-chrome electroplated wire, welded on 3" (76mm) spacing.
- Drip Trough:** Smooth polymer drip trough with catch pan.
- Holding Modules:** Removable without tools, digital thermometer, recessed control dials, master on/off switch, "Power On" light, water pan, ball bearing blower forced air system, 7 1/2' cord, UL, CUL, and NSF Listed.

## Electrical and Performance:

- Holding Module:** 80°F (27°C) to 200°F (93°C) operating temperature range. Available in 120V 2000W & 1440W, and 220-240V 1681-2000W configurations.
- Moisture Module:** 80°F (27°C) to 200°F (93°C) operating temperature range. 35% RH at 160°F (71°C), 95% RH at 95°F (35°C). Available in 120V 2000W, and 220-240V 1681-2000W configurations.
- Combination Module:** 80°F (27°C) to 200°F (93°C) operating temperature range. 95% RH at 95°F (35°C). Available in 120V 2000W & 1440W, and 220-240V 1681-2000W configurations.
- Clearance Requirements:** 18" (46cm) away from any cooking equipment. AVOID contact with surfaces that exceed 200°F (90°C). Minimum clearance from enclosures is 1 1/2" (38mm) on sides, back and top.
- Slide Capacities:**

Cabinet Size	Universal Wire Pan Capacity**				Lip Load Pan Capacity		Fixed Wire Pan Capacity	
	Slide Pairs Provided		18"x26"	12"x20"x2.5" GN 1/1	18"x26"	18"x26"	12"x20"x2.5" GN 1/1	
Full Height	18	37	18	34	35	18	34	
Full Height Dutch	18	35	17	32	34	17	32	
3/4 Height	14	29	14	26	27	14	26	
1/2 Height	8	17	8	16	17	8	16	

\*Maximum number of slide pairs @ 1 1/2" spacing. Additional slide pairs ordered separately.

\*\*Capacity based on standard number of slide pairs provided.

**C539-CDC-U**

Cabinet Height: 9 = Full Height, 7 = 3/4 Height, 5 = 1/2 Height  
 Module Type: C = Combination, M = Moisture, H = Heated Holding  
 Slide Type: U = Universal Wire, 4 = Fixed Wire, L = Lip Load Aluminum

Door Style: FS = Full Length Solid, FC = Full Length Clear, DS = Dutch Solid, DC = Dutch Clear \*

\*Please note: Dutch doors only available on full-height models. Cabinets ordered without a color designation default to Red.

## Low Watt Model Number Description

**C539-CLDC-U**

Add "L" for Lower Wattage Combination or Holding Module Cabinets (120V, 12A, 60Hz, 1440W)

## Export Model Number Description

**C539-CXDC-U**

Add "X" for Export Cabinets (220-240V, 7.6-8.3A, 50/60Hz, 1681-2000W)

## Blue or Gray Model Description

**C539-CDC-U-BU**

\*\* Cabinets ordered without a color designation default to Red.

Color \*\*  
 No Suffix = Red  
 BU = Blue  
 GY = Gray

## Models with Accessories or Options

**C539-CDC-UA**  
**C539-CDC-U-BUA**

An "A" suffix indicates that accessories need to be factory assembled to the cabinet. Order accessories separately.

## Options/Accessories\*

- Small Item Shelf (C5-SHELF-S)
- Stainless Steel Legs (C5-SSLEGS)
- Universal Slide Pair, Chrome (C5-USLIDEPR-C)
- 6" Casters (C5-6CASTER)
- Rear Rigid Casters (C5-5RDGCSTR)
- Travel Latch (C5-TRVL)
- Flush Door Latch (C5-LATCHFLUSH-1)\*
- Straight Plug, 20 Amp, 120V (C5-STRPLG-20)
- Straight Plug, 15 Amp, 120V (C5-STRPLG-15)
- Factory Left-Hand Hinging (DD3768)
- Stainless Steel Universal Slides (please call)

\*Please note: (2) handles required for dutch door models

Metro Heated cabinets are for hot food holding applications only.

an Ali Group Company



The Spirit of Excellence

Beltram Edge Tool Supply, Inc.

13.93

C5 3 Series Insulation Armour™ Heated Holding and Proofing Cabinets





# ALUMINUM NESTING PAN RACK



## SPACESAVING DESIGN

**Item #:** \_\_\_\_\_ **Qty #:** \_\_\_\_\_

**Model #:** \_\_\_\_\_

**Project #:** \_\_\_\_\_

## DIMENSIONS and SPECIFICATIONS

TOL  $\pm$  .500"

ALL DIMENSIONS ARE TYPICAL



**NR-20  
Shown**



**NR-12  
Shown**

### FEATURES:

Nesting design to facilitate maximum storage in minimum space.

Heavy Duty welded construction.

12 or 20 Pan capacity.

1" x 1-1/2" ribbed angles.

Heavy Duty 5" Stem Swivel Casters.

500 lb. Maximum Load.


### CONSTRUCTION:

Fully welded 1" square tubing frame and diagonal cross supports.

Angles are 1" x 1-1/2" fully welded

### MATERIAL:

Extruded aluminum angles, upright tubing, and support pieces.

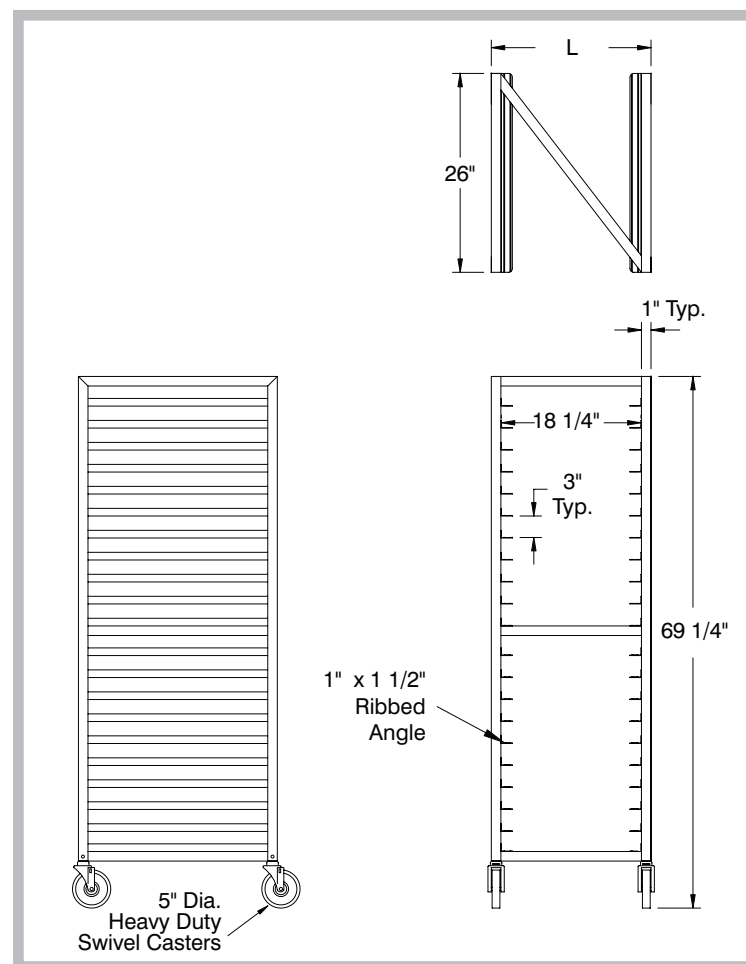

MODEL #	Pan Capacity	Shelf Spacing	Overall Size L x W x H	Weight
<b>NR-12</b>	12 Full or 24 Half Size	5"	21" x 26" x 69 1/4"	28 lbs.
<b>NR-20</b>	20 Full or 40 Half Size	3"	21" x 26" x 69 1/4"	29 lbs.



**Customer Service Available To Assist You 1-800-645-3166 8:30 am - 8:00 pm E.S.T.**

Email Orders To: [customer@advancetabco.com](mailto:customer@advancetabco.com). For Smart Fabrication™ Quotes, Email To: [smartfab@advancetabco.com](mailto:smartfab@advancetabco.com) or Fax To: 631-586-2933

**NEW YORK**  
Fax: (631) 242-6900

**GEORGIA**  
Fax: (770) 775-5625

**TEXAS**  
Fax: (972) 932-4795

**NEVADA**  
Fax: (775) 972-1578

## S T E A M

# VULCAN

## VG SERIES MODULAR GAS TILTING BRAISING PAN



Shown with enclosed faucet bracket



ANSI/NSF Standard #4

### SPECIFICATIONS

Modular gas tilting braising pan. 36"/46" wide open base. Stainless steel front, sides and 12" legs with adjustable flanged feet. Stainless steel back. Front hinged polished stainless steel pan body with coved interior corners and embossed gallon markings. Stainless steel cooking surface bonded to steel plate. Full width 4" return flange with formed pouring lip and removable strainer. Stainless steel spring assist cover with wrap around handle and condensate lip. Faucet mounting bracket (non-enclosed) field reversible "L" bracket either side. Drop away food receiving pan support mounts under pouring lip. Manually operated pan tilting mechanism with removable handle. Pan can be fully tilted to empty completely with approximately 30 crank revolutions. One 30,000 BTU/hr. burner for each 12" pan width. Burners shut off when pan is tilted 5°. Electronic ignition system for automatic burner light. Solid state temperature controls. Water tight controls and enclosures. Requires a 120/60/1 electrical power supply, 9.0 amps total draw. 3/4" rear gas connection and internal gas combination valve with integral regulator.

#### Exterior Dimensions:

\_\_\_\_"w x 35 1/2"d x 40 1/2"h on 12" legs.

CSA design certified. Classified by UL to NSF Std. #4.

**SPECIFY TYPE OF GAS WHEN ORDERING.**

**SPECIFY ALTITUDE WHEN ABOVE 2,000 FT.**

- ☐ **VG30** 36" wide open base.
- ☐ **VG40** 46" wide open base.

### STANDARD FEATURES

- Stainless steel front, back, sides and 12" legs with adjustable flanged feet.
- Front hinged polished stainless steel pan body with coved interior corners and embossed gallon markings. Stainless steel cooking surface bonded to steel plate. Full width 4" return flange with formed pouring lip and removable strainer.
- Stainless steel spring assist cover with wrap around cool to the touch handle and condensate lip.
- Lid stops in place for vented cooking.
- Faucet mounting bracket (non-enclosed) field reversible "L" bracket either side.
- Drop away food receiving pan support mounted under pouring lip.
- Manually operated anti-jam pan tilting mechanism with removable handle. Pan can be fully tilted to empty completely with approximately 30 crank revolutions.
- One 30,000 BTU/hr. burner for each 12" pan width. Burners shut off when pan is tilted 5°. Electronic ignition system for automatic burner lighting.
- Solid state temperature controls, adjustable from 50°F to 425°F.
- Water tight controls and enclosures.
- Requires a 120/60/1 electrical power supply, 9.0 amps.
- 3/4" rear gas connection.
- One year limited parts and labor warranty.
- Combination gas valve with built-in regulator.

### OPTIONS

- ☐ Motor driven pan lift with removable manual crank handle.
- ☐ Two inch draw-off valve – left front straight with strainer. (BPDOV-1) Pan support will be removed on VG30.
- ☐ Two inch draw-off valve – left front 90° left with strainer. (BPDOV-2) Pan support will be removed on VG30.
- ☐ Two inch draw-off valve – left side 90° front with strainer. (BPDOV-3)
- ☐ Standard security package includes:
  - Security screws and tackwelds.
  - Includes securing crank handle, pan strainer and non-door type panels.
  - Controls protected by lockable cover.
  - Perforated flue cover.
- ☐ Second year extended limited parts and labor warranty.

### ACCESSORIES (Packaged & Sold Separately)

- ☐ Set of four casters, (two locking).
- ☐ Faucet bracket assembly (adds 3" to width) enclosed.
- ☐ (12") (18") double jointed single pantry faucet.
- ☐ (12") (18") double jointed double pantry faucet.
- ☐ Double pantry washdown hose with 16" add-on faucet with backflow preventer.
- ☐ Double pantry washdown hose with backflow preventer.
- ☐ Double pantry pot filler and backflow preventer.
- ☐ Steaming pan insert rack to hold 12" x 20" pans. (Qty. \_\_\_\_)
- ☐ 12" x 20" x 4" stainless steel drain waste pan with clear plastic hose.
- ☐ Catch can with bail handle and drain hose for draw-off valve.
- ☐ Stainless steel perforated boiling basket (12" x 20" x 6" deep) with handles.

# VULCAN

a division of ITW Food Equipment Group LLC


P.O. Box 696 ■ Louisville, KY 40201 ■ Toll-free: 1-800-814-2028 ■ Local: 502-778-2791 ■ Quote & Order Fax: 1-800-444-0602

## S T E A M

# VULCAN

## VG SERIES MODULAR GAS TILTING BRAISING PAN

### SERVICE CONNECTIONS:

 **GAS INPUT:** 3/4" N.P.T., Nat. 7"-10.5" W.C.; Propane, 11"-13" W.C. See capacity schedule.

 **ELECTRICAL CONNECTION:** Control circuit 7/8" dia. 120 volt,  
1 phase, 15 amps, power cord.

### IMPORTANT:


1. A pressure regulator sized for this unit is included. Natural gas 7" W.C., propane gas 11" W.C. supply pressure.
2. Gas line connecting to appliance must be 3/4" or larger. If flexible hose with quick connects are used the hose and quick connects BTU flow rate must be a minimum of 120% of the appliance data plate BTU rate.
3. An adequate ventilation system is required for commercial cooking equipment. Information may be obtained by writing to the National Fire Protection Association, Batterymarch Park, Quincy, MA 02289. When writing, refer to NFPA No. 96.

4. These units are manufactured for installation in accordance with ANSZ223.1A (Latest edition), National Fuel Gas Code. Copies may be obtained from the American Gas Association, 1515 Wilson Blvd., Arlington, VA 22209.

5. Clearances:	Combustible	Non-combustible
Rear	6	0
Sides	2	0

6. This appliance is manufactured for commercial installation only and is not intended for home use.

MODEL	COOKING SURFACE AREA	MAX PAN OPENING	CAPACITY	4 OZ. PORTIONS
VG30	29" x 23"	31" x 28"	30 gal./ 114 liters	960
VG40	39" x 23"	41" x 28"	40 gal./ 152 liters	1280

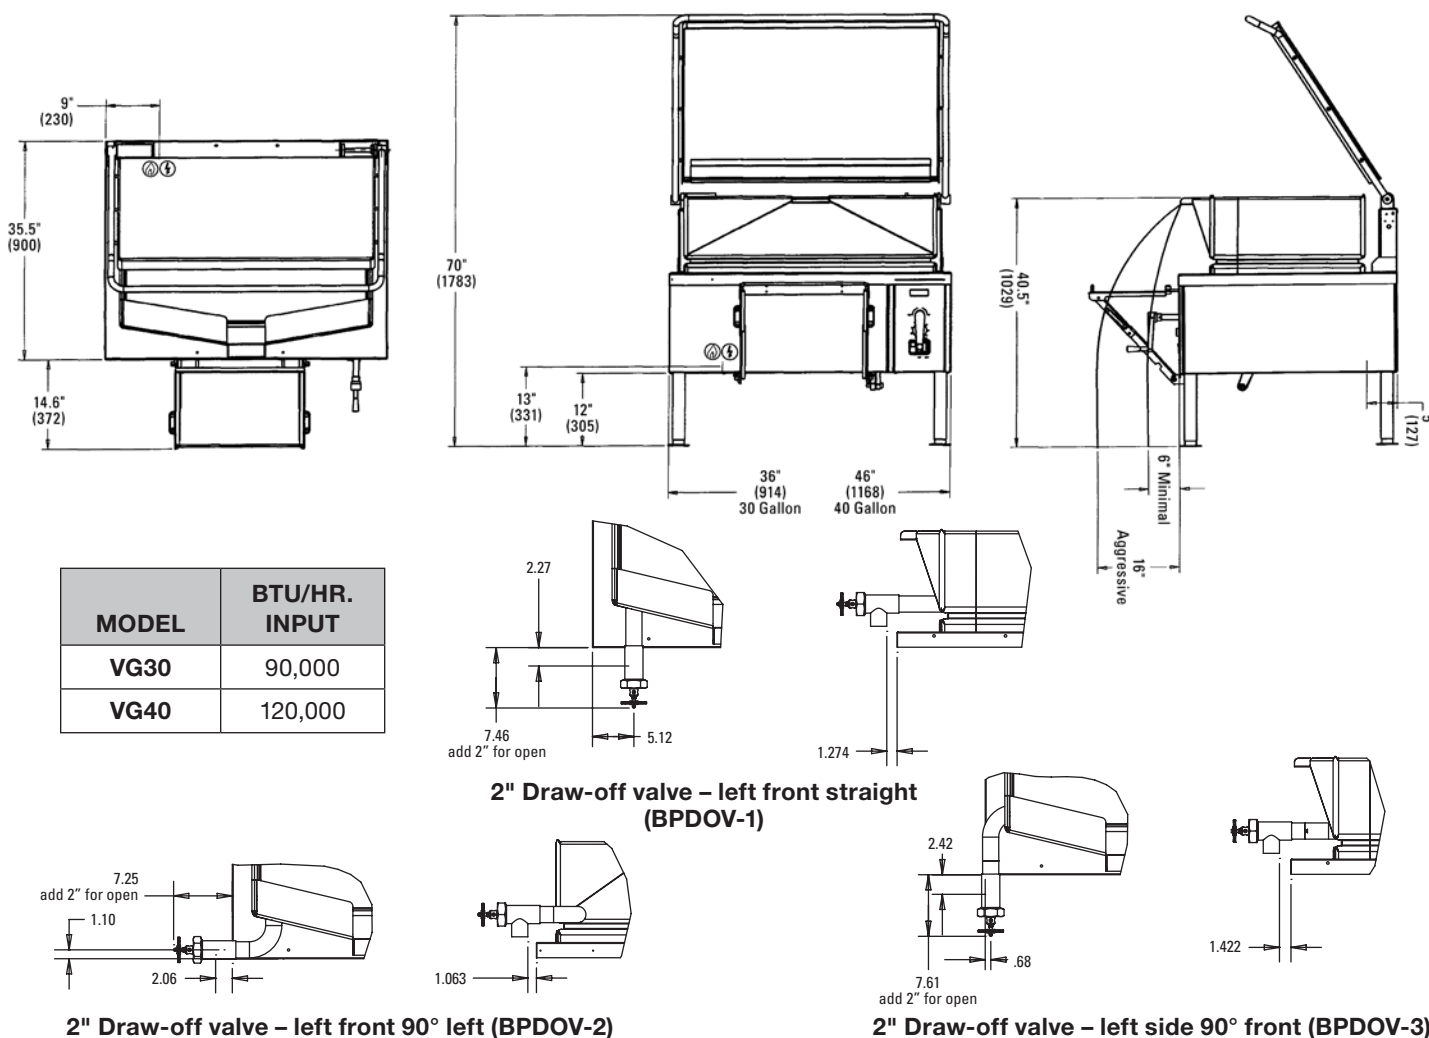

# VULCAN

a division of ITW Food Equipment Group LLC

P.O. Box 696 ■ Louisville, KY 40201 ■ Toll-free: 1-800-814-2028 ■ Local: 502-778-2791 ■ Quote & Order Fax: 1-800-444-0602

4/22/2021

**NOTE:** In line with its policy to continually improve its products, Vulcan has the right to change materials and specifications without notice.

# FREE Vulcan & Wolf New Equipment Checkout

A PARTNERSHIP WITH HOBART & AUTHORIZED WARRANTY SERVICE PROVIDERS



To ensure new Vulcan and Wolf equipment has been properly installed and is operating correctly, an authorized service technician will:

- Verify that the proper gas type (LP or natural) has been connected to the equipment
- Verify that the proper voltage and electrical connections have been made
- Verify that proper pressure regulators have been installed and adjusted, when applicable
- Verify that gas supply size and pressure are adequate
- Verify that proper water, steam, drain supplies and connections have been made
- Check to ensure the ventilation system is operating correctly
- Check pilot and burner adjustments
- Verify thermostat operation, including calibration, when required
- Check functional parts of operation, for example: doors, lids, valves, etc.
- Advise on preventive maintenance procedures

**To schedule your free checkout, please contact your sales rep!**

- Equipment must be completely installed and ready to operate before the equipment checkout request is made
- Equipment checkout should be completed within 90 days after installation



**WOLF**  
BidSync




**T&S BRASS AND BRONZE WORKS, INC.**

 2 Saddleback Cove / P.O. Box 1088  
 Travelers Rest, SC 29690

Model No.

**HG-4-K Series**

Item No.

Travelers Rest, SC: 800-476-4103 • Simi Valley, CA: 800-423-0150 • Fax: 864-834-3518 • www.tsbrass.com

This Space for Architect/Engineer Approval

Job Name \_\_\_\_\_ Date \_\_\_\_\_




Model Specified \_\_\_\_\_ Quantity \_\_\_\_\_

Customer/Wholesaler \_\_\_\_\_

Contractor \_\_\_\_\_

Architect/Engineer \_\_\_\_\_

# SAFE-T-LINK

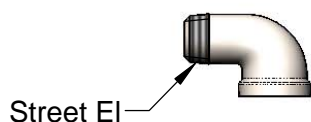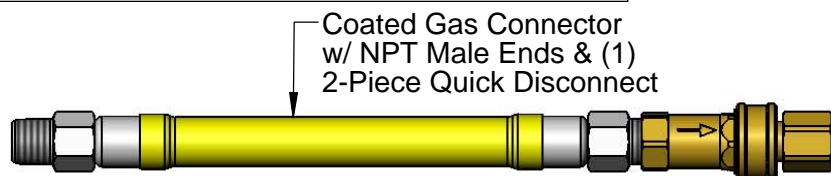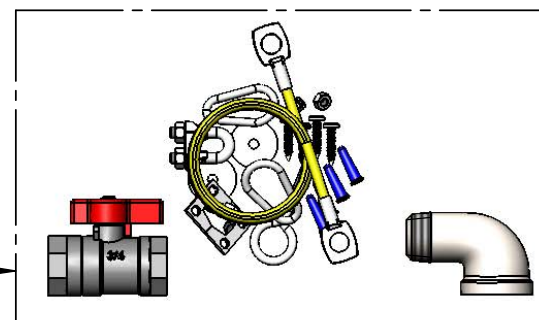
 Installation Kit:  
 Restraining Cable,  
 Street El, Ball Valve


"L" = Length	1/2" NPT
12"	HG-4C-12K
24"	HG-4C-24K
36"	HG-4C-36K
48"	HG-4C-48K
60"	HG-4C-60K
72"	HG-4C-72K

"L" = Length	3/4" NPT
12"	HG-4D-12K
24"	HG-4D-24K
36"	HG-4D-36K
48"	HG-4D-48K
60"	HG-4D-60K
72"	HG-4D-72K

"L" = Length	1" NPT
12"	HG-4E-12K
24"	HG-4E-24K
36"	HG-4E-36K
48"	HG-4E-48K
60"	HG-4E-60K
72"	HG-4E-72K

"L" = Length	1 1/4" NPT
12"	HG-4F-12K
24"	HG-4F-24K
36"	HG-4F-36K
48"	HG-4F-48K
60"	HG-4F-60K
72"	HG-4F-72K

**HG-4-K Series Product Configurator: HG - 4  -  K**

 Ex: HG - 4  -  K


 Gas Hose, 3/4" NPT Male Ends, 36" Length, (1) 2-Piece Quick Disconnect,  
 (1) Street El, (1) Installation Kit

Product Specifications:

 Safe-T-Link Gas Appliance Connector: Coated Gas Hose, NPT Male  
 Ends, 2-Piece Quick Disconnect and Street Elbow

Product Compliance:

 ANSI Z21.69 / CSA 6.16  
 NSF 2  
 NFPA 54



JOB:  
ITEM:  
QTY:

# ALUMINUM PLATFORM TRUCKS

## APPLICATION:

These all welded aluminum trucks are built to last! Available with smooth deck or diamond tread deck, these large deck Platform Trucks are ready to handle all of your material handling needs. A large 1 1/2" diameter pipe handle is easy on the hands and removes easily. Don't increase your load with a heavy steel truck; choose a heavy duty, lightweight aluminum truck for your material handling needs.

## MATERIAL:

Framework is constructed out of 1 1/2"x2"x.070" wall tubing. Handle is constructed out of 1 1/2" diameter pipe. Deck is constructed out of .125" aluminum sheet or .100" aluminum tread plate.

## CASTERS:

These trucks come equipped with four 6"x2" platform type casters, two swivel and two rigid.

## GUARANTEE:

These trucks carry a **Lifetime Guarantee** against rust and corrosion and also carry a **Five-Year Guarantee** against workmanship and material defects.



**Smooth Deck**




**Tread Plate Deck**



Phone: 800-255-0104  
Fax: 877-877-7687  
[www.newageindustrial.com](http://www.newageindustrial.com)  
[sales@newageindustrial.com](mailto:sales@newageindustrial.com)

New Age Industrial reserves the right to modify or make changes at any time without notice to materials and specifications.

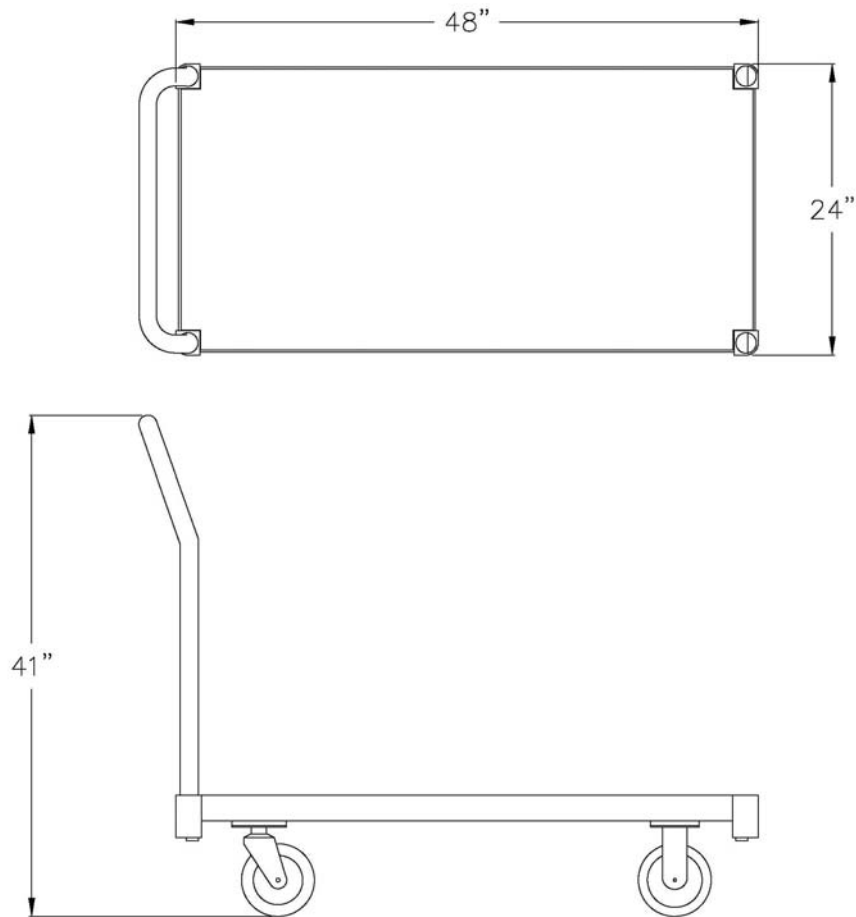

### Model #PT2448S6

Model No.	Size-W	Size-H	Size-L	Wt. Cap.	Deck Size
<b>Platform Truck With Smooth Deck</b>					
PT2436S6	24"	41"	39"	2600#	24"X36"
PT2448S6	24"	41"	51"	2600#	24"X48"
PT3048S6	30"	41"	51"	2600#	30"X48"
PT3060S6	30"	41"	63"	2600#	30"X60"
PT3660S6	36"	41"	63"	2600#	36"X60"
PT3672S6	36"	41"	75"	2600#	36"X72"
<b>Platform Truck With Tread Plate Deck</b>					
PT2436P6	24"	41"	39"	2600#	24"X36"
PT2448P6	24"	41"	51"	2600#	24"X48"
PT3048P6	30"	41"	51"	2600#	30"X48"
PT3060P6	30"	41"	63"	2600#	30"X60"
PT3660P6	36"	41"	63"	2600#	36"X60"
PT3672P6	36"	41"	75"	2600#	36"X72"



Phone: 800-255-0104  
 Fax: 877-877-7687  
[www.newageindustrial.com](http://www.newageindustrial.com)  
[sales@newageindustrial.com](mailto:sales@newageindustrial.com)

New Age Industrial reserves the right to modify or make changes at any time without notice to materials and specifications.

**REFRIGERATOR MANUFACTURER**  
**Turbo air**  
 more durable, efficient, beautiful

4184 E. Conant St.  
 Long Beach, CA 90808  
 Tel. 310-900-1000  
 Fax. 310-900-1077  
[www.turboairinc.com](http://www.turboairinc.com)

Project:	
Model #:	
Item #:	
Available W/H:	Qty:
Approval:	
AIA #:	SIS #:
CSI Section 11400	

## Solid Door Freezer

Reach-In Top Mount  
**M3 Series**

### FEATURES & BENEFITS

#### Self-Cleaning Condenser

The accumulation of dust in the condenser can cause the failure or breakdown of refrigerators. Refrigerators run normally until they reach a certain level of accumulation. At some point, when they are over the limit, their performance drops quickly resulting in damage to, or disposal of the stored products inside. The Self-Cleaning Condenser device keeps the condenser clean and prevents system failure by automatically brushing daily.

#### Digital temperature control & monitor system

- Keep food products safe by maintaining constant temperatures.
- Alarms that sound when doors are not sealed shut; protect against food spoilage that originates from cold air leaks.
- Early warning alarm program detects issues before malfunction occurs.
- Digital display allows for easy monitoring.
- Programs interpret the condition of refrigeration systems by self-diagnosis.
- Rapid cool-down function (Turbo Freeze).
- Smart defrost system will defrost as needed.
- Automatic evaporator fan motor delays.

#### Hydrocarbon refrigerants (R-290)

With innovative and eco-friendly technology, Turbo Air brings you hydrocarbon refrigerators designed to meet DOE's Energy Conservation Standards in 2017 and to use EPA's SNAP Program approved HC refrigerants. Hydrocarbon refrigerants do not deplete the ozone layer and have very low contribution to global warming (ODP-0, GWP-3).

#### Stainless steel exterior

The Turbo Air M3 freezer model boasts a stainless steel exterior (galvanized steel top, bottom and back) and AL interior with stainless steel floor. It guarantees the utmost in cleanliness and long product life. Sharp corners and edges have been rounded to reduce the risk of injury. The M3 adds a touch of style to the most refined setting.

#### Door pressure release device

Pressure relief doors are designed to eliminate vacuum pressure and allow easy, instant door opening.

#### LED interior lighting

#### Adjustable, heavy duty, PE (polyethylene) coated wire shelves

#### High-density polyurethane insulation

The entire cabinet structure and solid doors are foamed-in-place using high density, CFC free polyurethane insulation.


#### Top mount compressor

#### Freezer holds -10°F ~ 0°F for the best in frozen food preservation

**Model : M3F47-2-N**  
**M3F47-2-N-AL(-AR)**



#### Patented Self-Cleaning Condenser



This product is equipped with a fine mesh filter to the front of the condenser to catch dust, and a rotating brush that moves up and down daily to remove excess buildup outward and away.

- M3F47-2-N: Left hinged + Right hinged
- M3F47-2-N-AL: All left hinged
- M3F47-2-N-AR: All right hinged

**NATURAL**  
 Refrigerant



ENERGY STAR®  
 Qualified  
 (Standard hinged only)

Model	Swing Door	CU./FT.	#of Shelves	HP	AMPS	Crated Weight (lbs.)	L x D x H† (inches)
M3F47-2-N(-AL)(-AR)	2	42.1	6	2/3	6.3	435	51 3/4 x 30 3/4 x 78


Ver.20210212 Printed in U.S.A.

\* Depth does not include 2" for rear condensate enclosure. † Height does not include 5" for caster height.

# Solid Door Freezer

Reach-In Top Mount  
M3 Series

## Model : M3F47-2-N(-AL)(-AR)

ELECTRICAL DATA	
Voltage	115/60/1
Plug Type	 NEMA 5-15P
Full Load Amperes	6.3
Compressor HP	2/3
Feed Wires with Ground	3
Cord Length (ft.)	9
Refrigerant	R-290
DIMENSIONAL DATA	
# of Doors	2
# of Racks Accepted	2
Net Capacity (cu. ft.)	42.1
Ext. Length Overall (in.)	51 3/4 (1314mm)
Ext. Depth Overall (in.)*	30 3/4 (780mm)
Ext. Height Overall (in.)†	78 (1981mm)
Int. Length Overall (in.)	47 3/4 (1213mm)
Int. Depth Overall (in.)	26 1/2 (675mm)
Int. Height Overall (in.)	54 1/2 (1378mm)
# of Shelves	6
Shelf Size (L x D) (in.)	23 x 23 1/2
Gross Weight (lbs.)	435

Design and specifications subject to change without notice.

Actual shipping weight may differ due to extra packing materials for product protection.

\* Depth does not include 2" for rear condensate enclosure.

† Height does not include 5" for caster height.

### ■ WARRANTY : 3 Year Parts and Labor Warranty Additional 2 Year Warranty on Compressor

### ■ STANDARD FEATURES

- Anti-corrosion coated evaporator
- Self-contained system
- Standard 4" dia. swivel casters with locks on the front set
- Door locks standard
- Magnetic door gaskets
- Solid and sturdy grille design


### ■ OPTIONAL ACCESSORIES

- 5" caster, 1/2" diameter & 13 TPI: M726500100 (non-brake), M726500200 (w/ brake)
- 6" stainless steel leg: 30221M0600
- Additional PE coated wire shelf: G8F1800101
- Half door bun tray rack: TSP-2224 (each holds up to six 18"L x 26"D sheet pans)
- Full door bun tray rack: TSP-2250 (each holds up to fifteen 18"L x 26"D sheet pans)


Ver.20210212

## PLAN VIEW

(unit : inch)

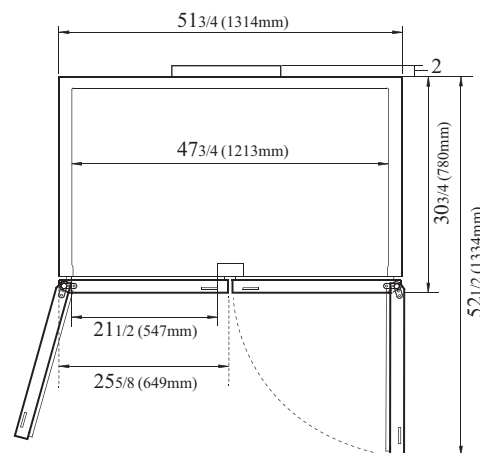

## TOP VIEW

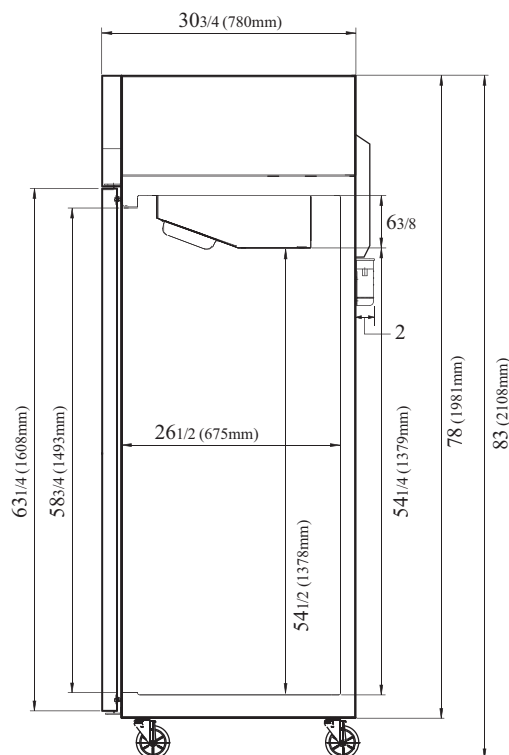

## SIDE VIEW



- Turbo Air : 800-627-0032 ■ GK : 800-500-3519
- Warranty : 800-381-7770 ■ AC : 888-900-1002



## COMBI

# VULCAN

## ABC SERIES GAS BOILERLESS COMBI OVEN STEAMER



Model ABC7G  
(shown on stand)



ABC



ABC-P



NSF/ANSI 4



ANS Z83.11 / CSA 1.8

### SPECIFICATIONS

Vulcan Combi Oven, Gas, Boilerless, 7 level full size combi, Model ABC or ABC-P. Engineered and assembled in USA. Just three knobs, no modes, only temperature, time and humidity for ultimate ease of use. Humidity level control automatically adjusts after setting temperature. Multiple cooking capabilities from one piece of equipment: Baking, Steaming, Roasting, Air-Fry, Rethermalization, Proofing, Finishing, Poaching, Stewing, Low Temp and Defrosting results. Direct steam creation for optimized cooking capability and production with minimal energy and water consumption. Auto-reversing fan with electrical braking system on fan motor. Large LED displays for temperature, time and humidity controls. Visual recall display of actual temperature and humidity LED's. Timer reloads for batch cooking after completion of timed cycle. Flashing door light & audible alarm system alert user when cooking cycle finished. Halogen door light behind heat reflective inner glass. (4) stainless steel Grab-N-Go Racks with 15½" x 3¼" cutout design for easy access to pans. Maximum capacity of (7) racks for a total of (7) 18" x 26" or (14) 12" x 20" pans. Machine diagnostics accessed thru controls or via USB. Cool to the touch & energy efficient heat reflective tempered glass door. All stainless steel interior cooking compartment, top, sides & fully insulated. One year limited parts and labor warranty.

#### Exterior Dimensions:

Combi: 35"H x 42.2"W x 43.5"D

Stand & Combi: 63.1"H x 42.2"W x 43.5"D

Stacked Combi: 75.2"H x 42.2"W x 43.5"D

- ☐ ABC7G-NAT  
☐ ABC7G-NATP

- ☐ ABC7G-PRO  
☐ ABC7G-PROP

### STANDARD FEATURES

- Engineered and assembled in Louisville, Kentucky, USA.
- Just three knobs, no modes, only temperature, time and humidity.
- Patent-pending humidity level control automatically adjusts after setting temperature.
- Multiple cooking capabilities from one piece of equipment: Baking, Steaming, Roasting, Air-Fry, Rethermalization, Proofing, Finishing, Poaching, Stewing, Low Temp and Defrosting results.
- Boilerless combi uses direct steam creation optimizing cooking capability & production with minimal energy & water.
- Auto-reversing fan with electronic braking system on fan motor.
- Large LED displays for temperature, time and humidity controls.
  - Temperature range: 80-450°F
  - Timer range: continuous (---) up to 23:59 hours and minutes
  - Humidity range: 0-100%
- Visual recall display of actual temperature and humidity LED's.
- Timer reloads for batch cooking after completion of timed cycle.
- Flashing door light & audible alarm system alert user when cooking cycle finished.
- Halogen door light behind heat reflective inner glass.
- (4) stainless steel Grab-n-Go Racks with 15½" x 3¼" cutout design for easy access to pans.
- Machine diagnostics accessed thru controls or via USB.
- Cool to the touch & energy efficient heat reflective tempered glass door.
- All stainless steel cavity, top, sides & fully insulated.
- One year limited parts and labor warranty (two year K-12).
- ABC-P models include food probe and fan speed control.

### OPTIONS

- ☐ Hollow Carbon Filter System - Good (Suggested Minimum):
- CB15K-SYSTEM - 15,000 gal. (carbon only treatment)
  - CB30K-SYSTEM - 30,000 gal. (carbon only treatment)
- ☐ Water Softening - Better (Carbon CBK System Required)
- WS-40 - 40 lb. capacity (hard water treatment)
- ☐ Reverse Osmosis System - Best
- V3MRO-1 up to 100 gpd capacity, single unit
  - V3MRO-2 up to 200 gpd capacity, double unit
- ☐ Second year extended limited parts and labor warranty contract.

### ACCESSORIES (Packaged & Sold Separately)

- ☐ GASKIT-ABC - Propane & altitude kit (2,000-10,000 ft.)
- ☐ ADDRACK-ABC1 - (1) One additional Grab-N-Go Rack
- ☐ ADDRACK-ABC3 - (3) Three additional Grab-N-Go Racks
- ☐ 1220-BASKET - Fry Basket 12" x 20"
- ☐ Stands & Stacking Kits include: (1) Spray Hose and Drip Tray Kit
- STACK-ABC/G - Gas stacking kit for two ABC7G combis.
  - STACK-ABC/CONV - Stack kit for combi/convection.
  - STAND-ABC/SS - Stainless steel open frame stand.
  - ABC-BASE - Stainless steel base for STAND-ABC/SS.
- ☐ HOSEWTR-3/4BBV - s/s flex water hose 72" length, ¾" female NSHT (2 per unit recommended).

# VULCAN

a division of ITW Food Equipment Group LLC

P.O. Box 696 ■ Louisville, KY 40201 ■ Toll-free: 1-800-814-2028 ■ Local: 502-778-2791 ■ Quote & Order Fax: 1-800-444-0602

## COMBI

# VULCAN

## ABC SERIES GAS BOILERLESS COMBI OVEN STEAMER

### WATER QUALITY STATEMENT:

The fact that a water supply is potable is no guarantee that it is suitable for steam generation. All steam equipment is subject to contamination and failure due to chemical and mineral content found in water. A suitable Hobart Water Treatment System and regular filter replacements coupled with routine deliming is the recommended minimum. Damage as a result of poor water quality or lack of required owner/operator maintenance is the responsibility of the owner/operator.

Your water supply must be within these general guidelines:

<b>DYNAMIC WATER PRESSURE</b>	30 - 60 psig
<b>HARDNESS*</b>	1 - 3 grains
<b>SILICA</b>	less than 13 ppm
<b>TOTAL CHLORIDE</b>	less than 30 ppm
<b>pH RANGE</b>	7-8
<b>CHLORINE &amp; CHLORAMINE</b>	0 ppm
<b>ALKALINITY</b>	less than 20 ppm
<b>TDS</b>	less than 60 ppm
<b>UN-DISSOLVED SOLIDS</b>	less than 5 microns

\* 17.1 ppm = 1 grain of hardness

Other factors affecting steam generation are iron content, amount of chlorination and dissolved gases. Water supplies vary from state to state and from locations within a state. Therefore it is necessary that the local water treatment specialist be consulted before the installation of any steam generating equipment.

### USER RESPONSIBILITY:

The product must be installed, cleaned and maintained as described in the Manual furnished with the product. It is the responsibility of the owner and installer to comply with local codes.

### SERVICE CONNECTIONS:

**Water:** ¾" NSHT female split water line connections (filtered and unfiltered).

**Drain:** 1" NPT male connection piped to open drain, 60" maximum length before open air gap and not more than two bends or elbows.


**Electrical:** 120 Volt, 15 Amp, NEMA 5-15P plug and cord.

**Gas:** 80,000 BTU, ¾" NPT female connection. Supply gas pressure should be: Natural gas 5" - 10.5" W.C.; Propane gas 11" - 13" W.C.

### NOTE:

**Clearance:** Left 1", Back 4", Right 3" required, 18" recommended for service access on right side.

The spark ignition in this appliance can cause electrical noise that can false trigger the GFCI detection. Some GFCI's are more sensitive than others. The use of a higher trip tolerance GFCI will reduce nuisance tripping. Contact Technical Support for more information.

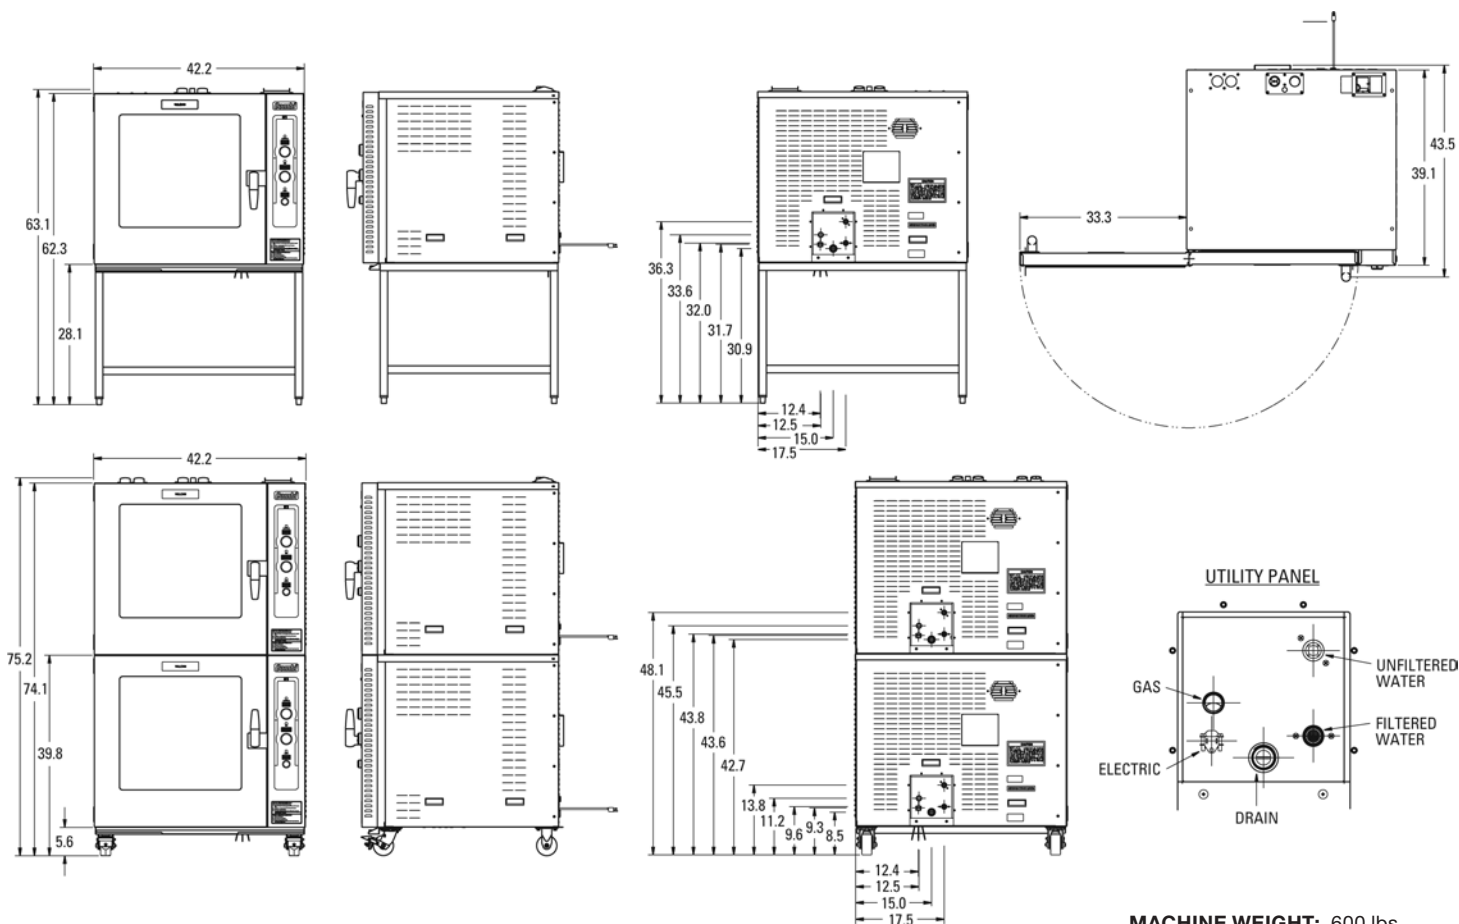

**MACHINE WEIGHT:** 600 lbs.

# VULCAN

a division of ITW Food Equipment Group LLC

P.O. Box 696 ■ Louisville, KY 40201 ■ Toll-free: 1-800-814-2028 ■ Local: 502-778-2791 ■ Quote & Order Fax: 1-800-444-0602

4/22/2021

**NOTE:** In line with its policy to continually improve its products, Vulcan has the right to change materials and specifications without notice.

# FREE Vulcan & Wolf New Equipment Checkout

A PARTNERSHIP WITH HOBART & AUTHORIZED WARRANTY SERVICE PROVIDERS



To ensure new Vulcan and Wolf equipment has been properly installed and is operating correctly, an authorized service technician will:

- Verify that the proper gas type (LP or natural) has been connected to the equipment
- Verify that the proper voltage and electrical connections have been made
- Verify that proper pressure regulators have been installed and adjusted, when applicable
- Verify that gas supply size and pressure are adequate
- Verify that proper water, steam, drain supplies and connections have been made
- Check to ensure the ventilation system is operating correctly
- Check pilot and burner adjustments
- Verify thermostat operation, including calibration, when required
- Check functional parts of operation, for example: doors, lids, valves, etc.
- Advise on preventive maintenance procedures

**To schedule your free checkout, please contact your sales rep!**

- Equipment must be completely installed and ready to operate before the equipment checkout request is made
- Equipment checkout should be completed within 90 days after installation



701 S Ridge Avenue, Troy, OH 45374  
1-888-4HOBART • www.hobartcorp.com

## WATER TREATMENT SYSTEMS STEAMER/COMBI (FLASH TYPE) APPLICATIONS

### STANDARD FEATURES

- Single cartridge hollow carbon filter system includes mounting bracket, 3/4" NPTF inlet and outlet, shut-off valve, test port, and gauge.
- Reduce Chloramine, Chlorine, Sediment, Bad Tastes and Odors, Total Organic Compounds, Tannins and Trihalomethanes
- Modular design is adaptable to accommodate changing water conditions
- Simple to install and service
- FOR COLD WATER USE ONLY
  - Min./Max. Pressure: 40 – 125 psi
  - Min./Max. Temperature: 40° – 100° F
  - CB15K-SYSTEM (00-847487-00001)
    - Rated Capacity (Gallons)\*: 15,000
    - Flow Rate: 3.7 gpm
    - Shipping Weight: 18 Lbs.
  - CB30K-SYSTEM (00-847487-00002)
    - Rated Capacity (Gallons)\*: 30,000
    - Flow Rate: 5 gpm
    - Shipping Weight: 20 Lbs.
- Quick-Change cartridge design for replacement without tools
- Replacement Cartridge Filters:
  - CB15K-PMKIT - 15,000 Gallon Rated Capacity (00-847487-1PMK)
  - CB30K-PMKIT - 30,000 Gallon Rated Capacity (00-847487-2PMK)
- Exterior dimensions:
  - CB15K-SYSTEM 14" w x 9" d x 23 7/8"
  - CB30K-SYSTEM 14" w x 9" d x 28 7/8"

### MODELS

- ☐ CB15K-SYSTEM
- ☐ CB30K-SYSTEM

Specifications, Details and Dimensions on Reverse Side.



\* Independently tested by an E.P.A. approved laboratory to ANSI/NSF Standard 42 & 53 specifications for the reduction of Cyst, Particulate Class I, Chlorine, Chloramine, Taste and Odor.



**HOBART**

WATER TREATMENT SYSTEMS STEAMER/COMBI (FLASH TYPE) APPLICATIONS

# WATER TREATMENT SYSTEMS STEAMER/COMBI (FLASH TYPE) APPLICATIONS

## HOBART

701 S Ridge Avenue, Troy, OH 45374  
1-888-4HOBART • www.hobartcorp.com

### NOTICE:

- Failure to replace cartridge before end of capacity life can result in pitting, rusting and discoloration due to Chloramines and Chlorine in water supply.
- Routine filter replacement & deliming are required for warranty consideration.
- This filter does not remove scale build-up due to hardness or other contaminants that may be in water.
- Hardness will result in scale build-up. Deliming is required to remove scale build-up or use of an additional treatment such as a water softener is recommended.
- Gallon capacity will vary according to flow rate, inlet pressure and local water conditions.
- Replace cartridge if outlet pressure gauge is less than 20 psi. or before end of capacity life (Maximum cartridge operating life 1 year.)

### Water Quality Statement

The fact that a water supply is potable is no guarantee that it is suitable for steam generation. Systems are not to be used where water is microbiologically unsafe or with water of unknown quality without adequate disinfections before

and after use. Other factors affecting steam generation include iron content, amount & type of chlorination, and dissolved gasses. Water supplies vary from state to state and from locations within a state.

**As with all steam related products, water filtration and regular filter replacements coupled with routine Deliming are required. Your local Hobart office can recommend a water treatment or filtration system to meet the needs of your local water conditions. Contact your local Hobart representative for water treatment offerings.**



### Note:

- Installation of backflow preventers, vacuum breakers and other specific code requirements is the responsibility of the owner and installer in compliance with local codes.



Recommended filter clearance needed for access:

Front 13"  
Bottom 4"

This appliance is manufactured for commercial installation only and not intended for home use.

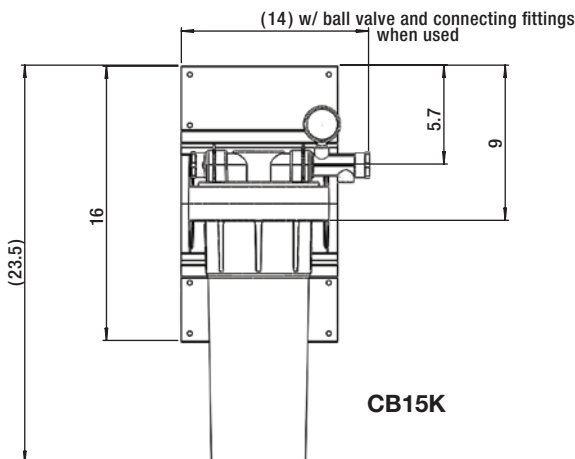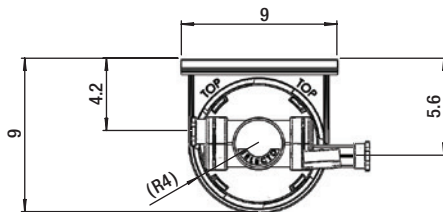

CB15K

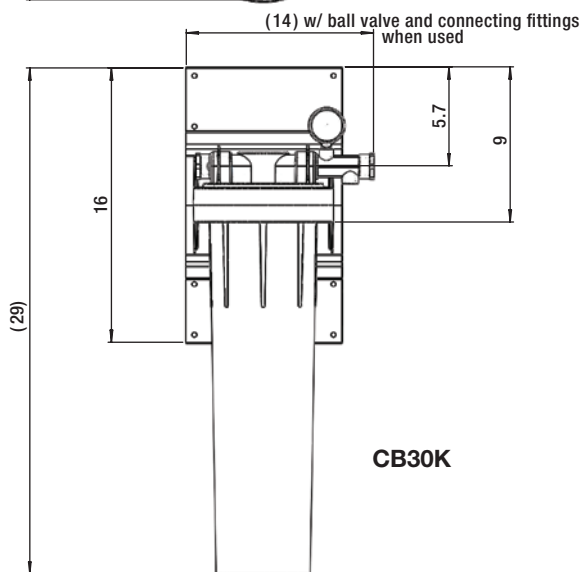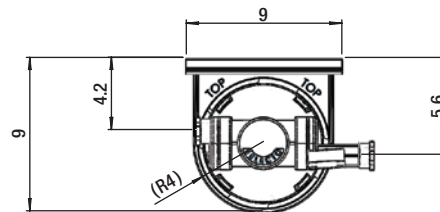

CB30K

### EXTERIOR DIMENSIONS:

MODEL	WIDTH	DEPTH	HEIGHT
CB15K-SYSTEM	14"	9"	23 <sup>7</sup> / <sub>8</sub>
CB30K-SYSTEM	14"	9"	28 <sup>7</sup> / <sub>8</sub>

As continued product improvement is a policy of Hobart, specifications are subject to change without notice.


**T&S BRASS AND BRONZE WORKS, INC.**

 2 Saddleback Cove / P.O. Box 1088  
 Travelers Rest, SC 29690

Model No.

**HG-4-K Series**

Item No.

Travelers Rest, SC: 800-476-4103 • Simi Valley, CA: 800-423-0150 • Fax: 864-834-3518 • www.tsbrass.com

This Space for Architect/Engineer Approval

Job Name \_\_\_\_\_ Date \_\_\_\_\_




Model Specified \_\_\_\_\_ Quantity \_\_\_\_\_

Customer/Wholesaler \_\_\_\_\_

Contractor \_\_\_\_\_

Architect/Engineer \_\_\_\_\_

# SAFE-T-LINK

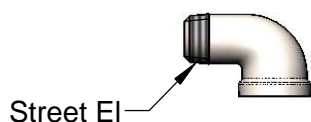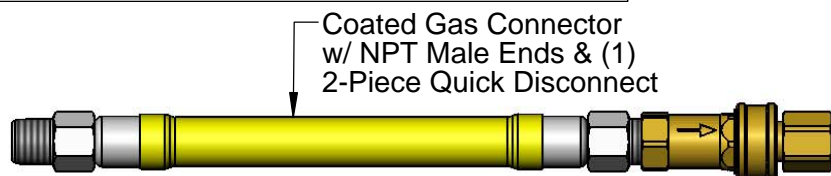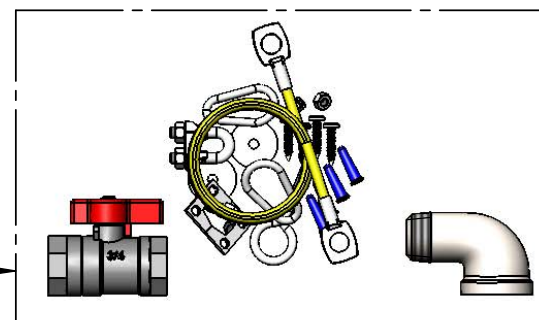
 Installation Kit:  
 Restraining Cable,  
 Street El, Ball Valve


"L" = Length	1/2" NPT
12"	HG-4C-12K
24"	HG-4C-24K
36"	HG-4C-36K
48"	HG-4C-48K
60"	HG-4C-60K
72"	HG-4C-72K

"L" = Length	3/4" NPT
12"	HG-4D-12K
24"	HG-4D-24K
36"	HG-4D-36K
48"	HG-4D-48K
60"	HG-4D-60K
72"	HG-4D-72K

"L" = Length	1" NPT
12"	HG-4E-12K
24"	HG-4E-24K
36"	HG-4E-36K
48"	HG-4E-48K
60"	HG-4E-60K
72"	HG-4E-72K

"L" = Length	1 1/4" NPT
12"	HG-4F-12K
24"	HG-4F-24K
36"	HG-4F-36K
48"	HG-4F-48K
60"	HG-4F-60K
72"	HG-4F-72K

**HG-4-K Series Product Configurator: HG - 4  -  K**

 Ex: HG - 4  -  K

 Gas Hose, 3/4" NPT Male Ends, 36" Length, (1) 2-Piece Quick Disconnect,  
 (1) Street El, (1) Installation Kit

**Product Specifications:**

 Safe-T-Link Gas Appliance Connector: Coated Gas Hose, NPT Male  
 Ends, 2-Piece Quick Disconnect and Street Elbow

**Product Compliance:**

 ANSI Z21.69 / CSA 6.16  
 NSF 2  
 NFPA 54

**REFRIGERATOR MANUFACTURER**  
**Turbo air**  
 more durable, efficient, beautiful

4184 E. Conant St.  
 Long Beach, CA 90808  
 Tel. 310-900-1000  
 Fax. 310-900-1077  
[www.turboairinc.com](http://www.turboairinc.com)

Project:	
Model #:	
Item #:	
Available W/H:	Qty:
Approval:	
AIA #:	SIS #:
CSI Section 11400	

## Solid Door Refrigerator

Reach-In Top Mount  
**M3 Series**

### FEATURES & BENEFITS

#### Self-Cleaning Condenser

The accumulation of dust in the condenser can cause the failure or breakdown of refrigerators. Refrigerators run normally until they reach a certain level of accumulation. At some point, when they are over the limit, their performance drops quickly resulting in damage to, or disposal of the stored products inside. The Self-Cleaning Condenser device keeps the condenser clean and prevents system failure by automatically brushing daily.

#### Digital temperature control & monitor system

- Keep food products safe by maintaining constant temperatures.
- Alarms that sound when doors are not sealed shut; protect against food spoilage that originates from cold air leaks.
- Early warning alarm program detects issues before malfunction occurs.
- Digital display allows for easy monitoring.
- Programs interpret the condition of refrigeration systems by self-diagnosis.
- Rapid cool-down function (Turbo cooling).
- Automatic evaporator fan motor delays.

#### Hydrocarbon refrigerants (R-290)

With innovative and eco-friendly technology, Turbo Air brings you hydrocarbon refrigerators designed to meet DOE's Energy Conservation Standards in 2017 and to use EPA's SNAP Program approved HC refrigerants. Hydrocarbon refrigerants do not deplete the ozone layer and have very low contribution to global warming (ODP-0, GWP-3).

#### Hot gas condensate system

Through Turbo Air's creative innovation, the condensate system surfaces have been specially treated to resist corrosion. This not only increases efficiency without the risk of refrigerant leakage from corrosion, but also thoroughly prevents the overflow of condensate water.

#### Stainless steel exterior

The Turbo Air M3 refrigerator model boasts a stainless steel exterior (galvanized steel top, bottom and back) and AL interior with stainless steel floor. It guarantees the utmost in cleanliness and long product life. Sharp corners and edges have been rounded to reduce the risk of injury. The M3 adds a touch of style to the most refined setting.

#### Door pressure release device

Pressure relief doors are designed to eliminate vacuum pressure and allow easy, instant door opening.

#### LED interior lighting

#### Adjustable, heavy duty, PE (polyethylene) coated wire shelves

#### High-density polyurethane insulation


The entire cabinet structure and solid doors are foamed-in-place using high density, CFC free polyurethane insulation.

#### Top mount compressor

**Model : M3R47-2-N**  
**M3R47-2-N-AL(-AR)**



#### Patented Self-Cleaning Condenser



This product is equipped with a fine mesh filter to the front of the condenser to catch dust, and a rotating brush that moves up and down daily to remove excess buildup outward and away.

#### Refrigerator holds 33°F ~ 38°F for the best in food preservation

- M3R47-2-N: Left hinged + Right hinged
- M3R47-2-N-AL: All left hinged
- M3R47-2-N-AR: All right hinged



Model	Swing Door	CU./FT.	#of Shelves	HP	AMPS	Crated Weight (lbs.)	L x D x H† (inches)
M3R47-2-N(-AR)(-AL)	2	42.3	6	1/3	2.8	401	51 3/4 x 30 3/4 x 78


Ver.20210212 Printed in U.S.A.

\* Depth does not include 2" for rear condensate enclosure. † Height does not include 5" for caster height.

# Solid Door Refrigerator

Reach-In Top Mount  
M3 Series

## Model : M3R47-2-N(-AL)(-AR)

ELECTRICAL DATA	
Voltage	115/60/1
Plug Type	 NEMA 5-15P
Full Load Amperes	2.8
Compressor HP	1/3
Feed Wires with Ground	3
Cord Length (ft.)	9
Refrigerant	R-290
DIMENSIONAL DATA	
# of Doors	2
# of Racks Accepted	2
Net Capacity (cu. ft.)	42.3
Ext. Length Overall (in.)	51 3/4 (1314mm)
Ext. Depth Overall (in.)*	30 3/4 (780mm)
Ext. Height Overall (in.)†	78 (1981mm)
Int. Length Overall (in.)	47 3/4 (1213mm)
Int. Depth Overall (in.)	26 1/2 (675mm)
Int. Height Overall (in.)	54 1/2 (1378mm)
# of Shelves	6
Shelf Size (L x D) (in.)	23 x 23 1/2
Gross Weight (lbs.)	401

Design and specifications subject to change without notice.

Actual shipping weight may differ due to extra packing materials for product protection.

\* Depth does not include 2" for rear condensate enclosure.

† Height does not include 5" for caster height.

### ■ WARRANTY : 3 Year Parts and Labor Warranty Additional 2 Year Warranty on Compressor

### ■ STANDARD FEATURES

- Anti-corrosion coated evaporator
- Self-contained system
- Standard 4" dia. swivel casters with locks on the front set
- Door locks standard
- Magnetic door gaskets
- Solid and sturdy grille design


### ■ OPTIONAL ACCESSORIES

- 5" caster, 1/2" diameter & 13 TPI: M726500100 (non-brake), M726500200 (w/ brake)
- 6" stainless steel leg: 30221M0600
- Additional PE coated wire shelf: G8F1800101
- Half door bun tray rack: TSP-2224 (each holds up to six 18"L x 26"D sheet pans)
- Full door bun tray rack: TSP-2250 (each holds up to fifteen 18"L x 26"D sheet pans)


Ver.20210212

## PLAN VIEW

(unit : inch)

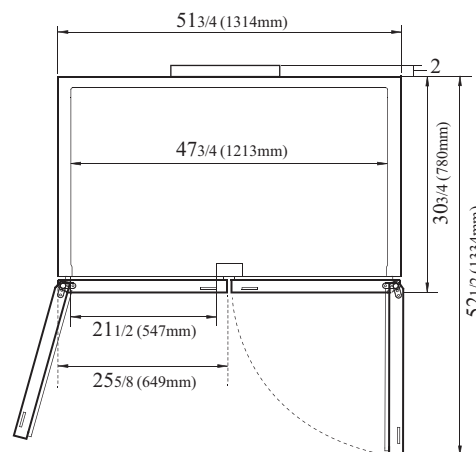

TOP VIEW

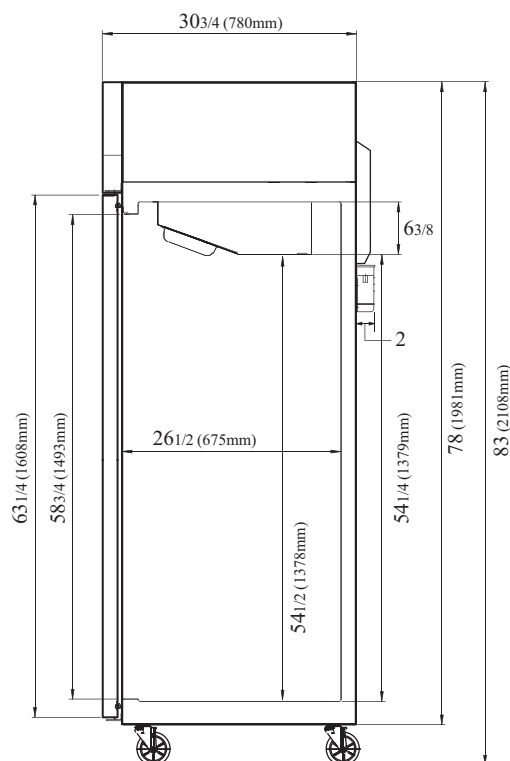

SIDE VIEW



- Turbo Air : 800-627-0032 ■ GK : 800-500-3519
- Warranty : 800-381-7770 ■ AC : 888-900-1002





JOB: \_\_\_\_\_

ITEM NO: \_\_\_\_\_

## COOK-N-HOLD LOW TEMPERATURE RADIANT OVEN 1000-CH-2D Series

### FEATURES AND BENEFITS:

- Ovens with two separate compartments and lower profile with two easy to see controls permit menu flexibility. Fully insulated Cook-N-Hold gentle radiant oven designed for flavorful results by slow cooking.
- Slow cooking means 15% to 20% less shrinkage.
- Efficient 6000 Watt power unit allows for reheating of prepared meals or bulk items. Maximum temperature 325° (163°C). Easy to read thermometer.
- Two individual standard solid state electronic controls with large, clean, easy-to-read and operate LED digital display to ensure holding at precise food temperatures.
- Factory installed cord and plug at no additional charge.
- Cook and hold over 240 lbs. (108 kg.) of meat in just 5 sq. ft. of floor space.
- Non-venting oven, permitted by most local codes, provides easy, inexpensive installation.
- Fully insulated, stainless steel interior for ease of cleaning; stainless steel or aluminum exterior.
- Oven is operable on either 208 or 240 Volt circuits at the flip of a switch.
- Smooth interior coved corners prevent food particle/grease buildup.
- Field reversible insulated doors prevent temperature loss. Silicone door gaskets for proper seal. High temperature ceramic magnetic latches for "easy open" and security during transport.
- Safety conscious anti-microbial latches protect against spreading germs. Standard with right hand hinging; left hand hinging available upon request.
- Removable stainless steel pan slides hold sixteen (16) 18" x 26" pans on 3" centers. Supplied with 3 wire grids per compartment.
- Heavy duty 5" casters, two swivel with brakes, two rigid. Provides mobility when fully loaded.

### POWER UNIT OPTIONS:

6000 Watts, 208/240 Volts, 1 Phase, 60 Hz.

6000 Watts, 208/240 Volts, 3 Phase, 60 Hz.

**Deluxe Models (-DX) have 18 factory or field programmed cook & hold cycles. Each programmed menu can be customized for exact time and temperature needs. Probe cooking includes one 6" meat temperature probe and port.**



Silver indicates our  
2-Year Parts / 1-Year Labor  
Warranty with Lifetime on heating  
elements (excludes labor)



5925 Heisley Road • Mentor, OH 44060-1833  
Phone: 877/CRESCOR • Fax: 440/350-7267  
www.crescor.com



1000-CH-SS-2DE

#### Standard (-DE)



All Ovens come standard with easy-to-read and operate LED digital controls.

#### Deluxe (-DX)



Deluxe Controls are available with 18 programmable menus and 6" meat probe.


### ACCESSORIES and OPTIONS (Available at extra cost):

- ☐ Deluxe version with 18 programmable menus and 6" meat probe (or optional 3" food probe).
- ☐ Additional Probes
- ☐ Tempered Glass Door Window
- ☐ Key Lock Latches
- ☐ Extra Wire Grids
- ☐ Perimeter Bumper
- ☐ Corner Bumpers
- ☐ Various Caster Options

See page E-10 for accessory details.

**Page E-7**  
**Jan., 2015**

## 1000-CH-2D Series

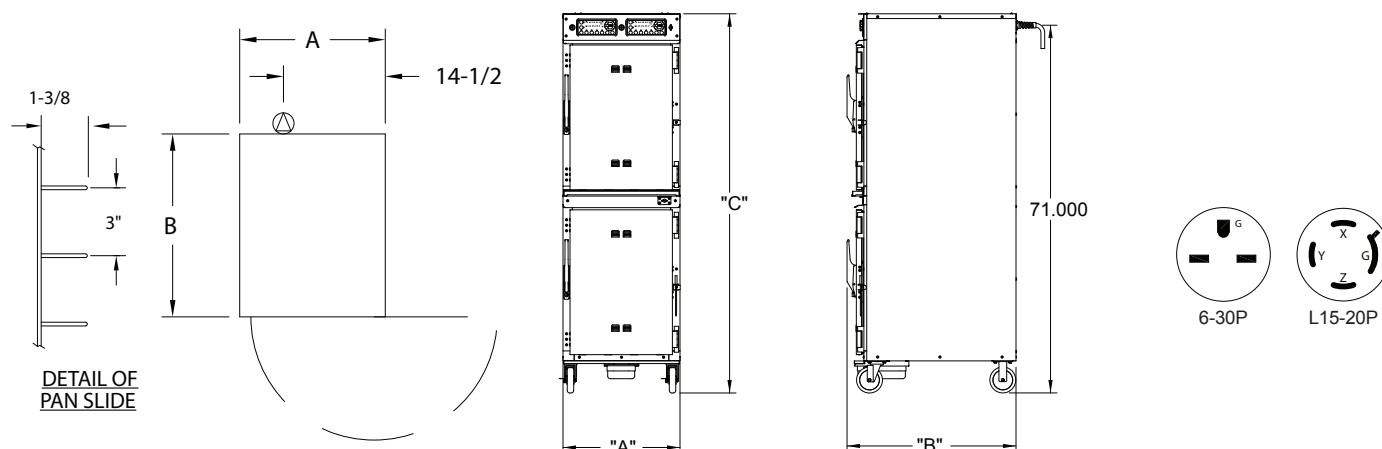

CRES COR MODEL NO.	PAN			DIM "A"	DIM "B"	DIM "C"	INSIDE DIMENSIONS				WEIGHT ACT.
	CAP	SIZE		WIDTH	DEPTH	HEIGHT	WIDTH	DEPTH	HEIGHT		
1000-CH-AL-2DE	16	18 X 26	IN	22-5/8	32-3/4	73-1/4	18-3/16	27	26-3/4	LBS	375
1000-CH-AL-2DX											
1000-CH-SS-2DE		460 X 660	MM	575	835	1860	465	690	680	KG	170
1000-CH-SS-2DX											

\*Inside dimensions for each compartment.

(-DE) models are standard models, (-DX) are upgraded deluxe models. See accessory sheet E-10 for more information.

**CABINETS:**

- 1000-CH-SS-D Body: 22 ga. stainless steel outer body.
- 1000-CH-AL-D Body: .063 aluminum outer body.
- Inner body & top: 18 ga. stainless steel.
- Reinforcements: Internal framework of 18 ga. stainless steel.
- Insulation: Fiberglass, thermal conductivity (K factor) is .23 at 75°F, 1-1/2" in walls, 1" in doors.
- Drip pan: 18 ga. stainless steel with drain; removable.
- Casters: 5" dia., modulus tires, 1-1/4 wide, load cap. 250 lbs. each, temp. range -45°/+180°F. Delrin bearings. Front swivel casters equipped with brakes; rigid casters on rear.

**DOORS:**

- Field reversible.
- Formed 20 ga. stainless steel.
- Latches: Anti-microbial chrome plated zinc with composite handle, ceramic magnetic type; mounted inboard.
- Hinges (4): Heavy duty chrome plated zinc; mounted inboard.
- Gaskets: Perimeter type, silicone.
- Adjustable vents.

**PAN SLIDES (removable):**

- 18 ga. stainless steel angles, 1 x 1-3/8; riveted on 3" centers.
- Grids: Stainless steel, 18 x 26; supplied with (3) grids per compartment.

**CLEARANCE REQUIREMENTS:**

- 3" (76mm) at the back, 2" (51mm) at the top, 1" (25mm) at both sides.

**POWER REQUIREMENTS:**

- 6000/5300 Watts, 208/240 Volts, 60 Hz., 1 phase, 30 Amp. Service 29 Amps at 208 Volts, 25 Amps at 240 Volts.
- 6000/5300 Watts, 208/240 Volts, 60 Hz., 3 phase, 20 Amp. Service 16 Amps at 208 Volts, 14 Amps at 240 Volts.



5925 Heisley Road • Mentor, OH 44060-1833

Phone: 877/CRESCOR • Fax: 440/350-7267

www.crescor.com

© Crescent Metal Products, Inc. 2015 All rights reserved.reserved.

**ELECTRICAL COMPARTMENTS:**

- Control panels: Formed stainless steel; black front.
- Thermostats (cook/hold): Solid state digital display control, 140°F (60°C) to 325°F (163°C).
- Switches: ON-OFF push button type.
- Power Cord: Permanent, 6 ft. 10/3 ga. with right angle plug.
- Three (3) heater circuits each compartment
- Thermometers: Digital display.
- Voltage selector switch: Change to 208 or 240 Volt; on back of oven.

**INSTALLATION REQUIREMENTS:**

- This model complies with section 59 of UL710B for emissions of grease laden air, and according to UL is not required to be placed under a ventilation hood. Check local requirements before installation.

**SHORT FORM SPECIFICATIONS**

Cres Cor Insulated Radiant Oven Model 1000-CH-\_\_\_\_-2D\_\_\_\_; Solid state electronic controlled times and temperatures. Outer body of 22 ga. stainless steel for the 1000-CH-SS Series and .063 aluminum for the 1000-CH-AL Series. Inner body, top and frame of 18 ga. stainless steel. Fiberglass insulation 1-1/2" in walls; 1" in door. Stainless steel internal frame; coved corners. Anti-microbial chrome plated latches. Separate thermometer for each compartment. Six (6) heated inner walls. Removable pan supports for (16 or 8) 18" x 26" pans spaced on 3" centers. Casters 5" modulus casters (2) swivel, (2) rigid, Delrin bearings. Load capacity 250 lbs. each. 6000 Watts, 208/240 Volts, 60 Hz., \_\_\_\_ Phase. 2-Year Parts / 1-Year Labor warranty. Lifetime on heating elements (excluding labor). Provide the following accessories: \_\_\_\_\_. CSA-US, CSA-C, CSA to NSF4 listed.

*In line with its policy to continually improve its products, CRES COR reserves the right to change materials and specifications without notice.*

Litho in U.S.A.



JOB: \_\_\_\_\_

ITEM NO: \_\_\_\_\_


## INSULATED STAINLESS STEEL RADIANT HOT CABINET MODEL 1000-HH-SS-2DE

### FEATURES AND BENEFITS:

- Heated cabinet has two separate compartments and controls for flexibility in hot holding needs.
- Fully insulated cabinets keep prepared foods at serving temperatures.
- Powerful, yet efficient, 1800 Watt heating system maintains the right temperature to properly hold products. Heats up to 200°F. (93°C.).
- Simple LED electronic digital display to ensure holding at precise food temperature.
- Internal frame in body and doors maintains structural rigidity.
- Safety-conscious anti-microbial latches protect against spreading germs.
- Stainless steel construction throughout for ease of cleaning.
- Insulated field reversible doors for flexibility. Standard with right hand hinging; left hand hinging available upon request.
- Magnetic latches for "easy open"; twist-lock catch secures doors during transport. Latches and hinges mounted inboard.
- Wire pan supports are removable for easy cleaning and hold both 18" x 26" pans and 12" x 20" pans on 2-3/4" centers.
- Heavy duty 5" casters, two swivel with brakes, two rigid. Provides mobility when fully loaded.



1000-HH-SS-2DE

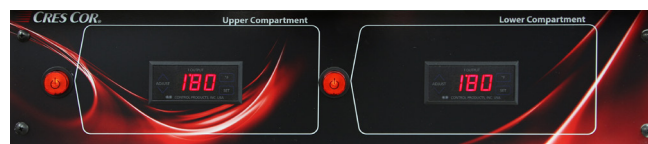

Easy-to-operate electronic controls with LED digital display to ensure holding at precise food temperature.

### ACCESSORIES and OPTIONS (Available at extra cost):

- ☐ Key Lock Handles
- ☐ Corner Bumpers
- ☐ Perimeter Bumper
- ☐ Door Window
- ☐ Various Caster Options
- ☐ 240 Volt Service
- ☐ Various Interior Rack Options


See page B-30 for accessory details.



5925 Heisley Road • Mentor, OH 44060-1833  
Phone: 877/CRESCOR • Fax: 440/350-7267  
www.crescor.com

Page B-11.1  
Aug, 2017

## 1000-HH-SS-2DE

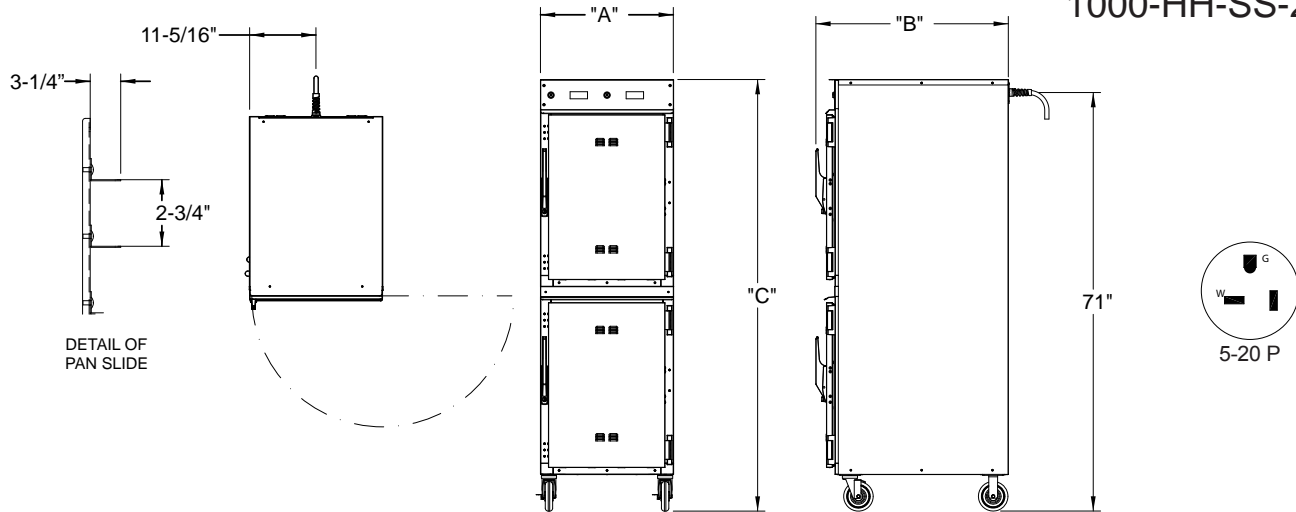

CRES COR MODEL NO.	PAN			DIM "A"	DIM "B"	DIM "C"	INSIDE DIMENSIONS				WEIGHT ACT.
	CAP	SIZE		WIDTH	DEPTH	HEIGHT	WIDTH	DEPTH	HEIGHT		
1000-HH-SS-2DE	16	18 x 26	IN	22-5/8	32-3/4	73-1/4	18-3/16	27	26-3/4	LBS	265
		460 x 660	MM	575	835	1860	465	690	680	KG	120
	16	12 x 20	IN								
		305 x 510	MM								

When ordering bumpers, add 2" to overall dimensions.

**CABINETS:**

- Bodies: 22 ga. outer and 18 ga. inner stainless steel compartments.
- Reinforcements: Internal framework of 18 ga. stainless steel.
- Insulation: Fiberglass, thermal conductivity (K factor) is .23 BTU/ft HR °F (.04 w/mK) at 75°F. 1-1/2" in top, bottom and walls, 1" in doors.

**BASE:**

- One piece construction, .060 stainless steel.
- Casters: 5" dia., modulus tires, 1-1/4 wide, load cap. 250 lbs. each, temp. range -45°/+180°F. Delrin bearings. Front swivel casters equipped with brakes; rigid casters on rear.

**DOORS:**

- Field reversible.
- Formed 20 ga. stainless steel.
- Latches: Chrome plated zinc with composite handle, magnetic type; mounted inboard.
- Transport knob.
- Hinges: Heavy duty chrome plated zinc; mounted inboard.
- Gaskets: Perimeter type, silicone.
- Vents: Adjustable.

**PAN SLIDES:**

- Wire rack with .250 dia. wire vertically and .208 dia. wire horizontally. Nickel chrome plated steel spaced on 2-3/4" centers.

**HOT UNIT COMPONENTS:**

- Thermostats: Electronic temperature control with digital temperature display. Display accurate to  $\pm 2^{\circ}\text{F}$ .
- Switches: ON-OFF push button type.
- Power cord: Permanent, 6 ft., 12/3 ga. with right angle plug.
- Heaters(6): 300 Watts each.
- Vent fans.

**POWER REQUIREMENTS:**

- 1800 Watts, 120 Volts, 60 Hz., single phase, 15 Amps., 20 Amp. service.

**SHORT FORM SPECIFICATIONS**

Cres Cor Insulated Hot Stainless Steel Cabinet Model 1000-HH-SS-2DE. Outer liner of 22 ga., stainless steel, inner liner of 18 ga. stainless steel, reinforced with channel frame. Fiberglass insulation in walls 1-1/2"; door, top and bottom 1". Welded and finished. (6) 300 Watt inner wall heaters, 120 volts. Removable pan supports for (16) 18" x 26" pans or (16) 12" x 20" pans spaced on 2-3/4" centers. Casters 5" modulus casters (2) swivel, (2) rigid, Delrin bearings. Load capacity 250 lbs. each. 2-Year Parts / 1-Year Labor warranty. Provide the following accessories: \_\_\_\_\_  
 \_\_\_\_\_ CSA-US, CSA-C, CSA to NSF4 listed.



Scan QR code to view Spec Sheet,  
Operating Manual, Wiring Diagram  
or to call Customer Service.

If you need a QR reader visit your App  
Store on your Smartphone or Tablet.

**CRES COR®**

5925 Heisley Road • Mentor, OH 44060-1833

Phone: 877/CRESCOR • Fax: 440/350-7267

www.crescor.com

© Crescent Metal Products, Inc. 2017 All rights reserved.

In line with its policy to continually improve its products,  
CRES COR reserves the right to change materials and  
V S H F L & F D W L R Q V Z L W K R X W Q R W L F H  
Made in America Since 1936



## Model 761218 Wall Mount Water Bottle Refilling Station, Filtered, Graphite/Stainless Steel

# Specifications



**Model 761218  
Wall Mount Water Bottle  
Refilling Station, Filtered,  
Graphite/Stainless Steel**

**Rated for indoor  
use only**

**Replacement Filters:  
Model 670336**

For more information visit:  
[globalindustrial.com](http://globalindustrial.com)  
or call 1-800-645-1232

### FEATURES:

- Touchless, sensor activation with auto 20-second shut-off
- Easy-touch front and side push-bar control
- 3000-gallon capacity filtration system with NSF/ANSI 42 & 53 (lead, class 1 particulate, chlorine, taste and odor)
- Keyed door for easy filter access
- Quick-fill rate of 1.0 GPM
- Laminar water flow ensures minimal splash
- Drainage system eliminates standing water
- LED filter level indicator display
- LED display counter tracks bottle quantity saved from waste
- Flexible safety bubbler

### COOLING SYSTEM:

- Hermetically-sealed, single-phase reciprocating compressor; lifetime lubrication
- Fan cooled condenser with copper tube and aluminum fins; permanently lubricated motor
- Cooling system includes self-cleansing tube tank, continuous copper tubing, stainless steel tank and EPS foam insulation; meets UL requirements for self-extinguishing material
- R134a refrigerant
- Easily accessible and adjustable thermostat

### CONSTRUCTION:

- Stainless steel pan with integral drain
- Galvanized structural steel frame
- Stainless steel bottle filler trim
- Rust-proof and dent resistant lower cover

Meets ADA Guidelines




Lead-Free Certified to NSF/ANSI 372

Certified to UL399 and CAN/CSA 22.2 No. 120

### WARRANTY:

5 year limited warranty on refrigeration system. Electrical components and water system are warranted for 12 months from the date of installation, or 18 months from the shipment date (whichever date comes first).

## Specifications Chart

Specifications Chart							
Model	Voltage/Hertz	*Chilling Cap.	F.L. Amps	Rated Watts	UL399 and CAN/CSA 22.2 No. 120 Certified	ADA Compliant	ANSI/NSF 372 Certified
761218	115V/60Hz	8 GPH	1.9	219	✓	✓	✓

\*At 46° - 54° (F) against ambient air temperature of 77° (F)

PATENTED AND OTHER PATENTS PENDING

Supplier: **Beltram Edge Tool Supply, Inc.**

**CONTACT INFORMATION FORM**

IN ACCORDANCE WITH AD-21-04 titled “**Kitchen Equipment for City of Pembroke Pines Charter Schools**” attached hereto as a part hereof, the undersigned submits the following:

**A) Contact Information**

The Contact information form shall be electronically signed by one duly authorized to do so, and in case signed by a deputy or subordinate, the principal's properly written authority to such deputy or subordinate must accompany the proposal. This form must be completed and submitted through [www.bidsync.com](http://www.bidsync.com) as part of the bidder's submittal. The vendor must provide their pricing through the designated lines items listed on the BidSync website.

**COMPANY INFORMATION:**

COMPANY: **IFG INC., DBA BELTRAL EDGE TOOL SUPPLY**

STREET ADDRESS: **11101 N 46th St**

CITY, STATE & ZIP CODE: **TAMPA**

**PRIMARY CONTACT FOR THE PROJECT:**

NAME: **Rita Croker** TITLE: **Institutional Sales Coordinator**

E-MAIL: **rcroker@beltram.com**

TELEPHONE: **8139858870 x1302** FAX: **8139856080**

**AUTHORIZED APPROVER:**

NAME: **MARTY LEVENSTIEM** TITLE: **VP PURCHASING**

E-MAIL: **mlevenstiem@the-ifg.com**

TELEPHONE: **8139858870** FAX: **(813) 985-6080**

SIGNATURE: **Marty Levenstiem**

**B) Proposal Checklist**

Did you make sure to submit the following items, as stated in section 1.5 “Proposal Requirements” of the bid package?

Attachment A - Contact Information Form	Yes <input checked="" type="checkbox"/>
Attachment B - Non-Collusive Affidavit	Yes <input checked="" type="checkbox"/>
Attachment C - Proposer’s Completed Qualification Statement	Yes <input checked="" type="checkbox"/>

Did you make sure to update the following documents found under the “Vendor Registration” group of “Qualifications” on the BidSync website for the City of Pembroke Pines?

Vendor Information Form	Yes <input checked="" type="checkbox"/>
Form W-9 (Rev. October 2018)	Yes <input checked="" type="checkbox"/>
Sworn Statement on Public Entity Crimes Form	Yes <input checked="" type="checkbox"/>
Local Vendor Preference Certification	Yes <input checked="" type="checkbox"/>
Local Business Tax Receipts	Yes <input checked="" type="checkbox"/>
Veteran Owned Small Business Preference Certification	Yes <input checked="" type="checkbox"/>
Equal Benefits Certification Form	Yes <input checked="" type="checkbox"/>
Vendor Drug-Free Workplace Certification Form	Yes <input checked="" type="checkbox"/>
Scrutinized Company Certification	Yes <input type="checkbox"/>
E-Verify System Certification Statement	Yes <input checked="" type="checkbox"/>

### C) Sample Proposal Form

*The following sample price proposal is for information only. The vendor must provide their pricing through the designated lines items listed on the BidSync website.*

#### Base Option:

Total Qty	Item	Description	Total Cost
96	STEAM TABLE PAN, STAINLESS STEEL	ABC Procurement Model No. 88002931 Food pan, full 2-1/2" deep, 25 gauge stainless steel, packet of 6	<b>Price to be Submitted Via BidSync</b>
96	STEAM TABLE PAN, STAINLESS STEEL	ABC Procurement Model No. 88004931 Food pan, full, 4" deep, 25 gauge stainless steel, packet of 6	<b>Price to be Submitted Via BidSync</b>
72	BUN/SHEET PAN	ABC Procurement Model No. 5324 Sheet pan, full size, 18" x 26" x 1", 18 gauge aluminium, packet of 12	<b>Price to be Submitted Via BidSync</b>
5	HEATED HOLDING PROOFING CABINET, MOBILE	Metro Model No. C539-CFS-4 C5™ 3 Series Heated Holding & Proofing Cabinet, with Red Insulation Armour™, mobile, full height, insulated cabinet & door, removable bottom mount control module, thermostat to 200°F, fixed wire slides on 3" centers (18) 18" x 26" or (34) 12" x 20" x 2-1/2" pan capacity, 5" casters (2 with brakes), aluminum, 120v/60/1-ph, 2000 watts, 16.7 amps, NEMA 5-20P, cULus, NSF 3 ea 1 year warranty against manufacturing defects	<b>Price to be Submitted Via BidSync</b>
4	NESTING PAN RACK	Advanced Tabco Model No. NR-20-X Mobile pan, full height, nesting design, open sides, with angle tray guides on 3" centers, capacity 20 - 18" x 26" sheet pans or 40 - half-size pans, all- welded aluminum construction, front loading, 69- 1/4" high	<b>Price to be Submitted Via BidSync</b>
4	BUSSING UTILITY TRANSPORT CART	Rubbermaid Commercial Products Model No. FG335588PLAT Utility Cart, 31"L x 18"W x 37-1/2"H, (3) shelves, smooth surface, handles, enclosed ends, plastic construction, (4) casters, assembly required, platinum, NSF, HACCP	<b>Price to be Submitted Via BidSync</b>
1	BUSSING UTILITY TRANSPORT CART	Rubbermaid Commerical Products Model No. FG452088BLA Material Handling/Heavy Duty Utility Cart, 44"L x 25-1/4"W x 39"H, 500 lb. total capacity, (2) lipped	<b>Price to be Submitted Via BidSync</b>

		shelves, open base, polypropylene, (4) 5" thermoplastic rubber (TPR) casters, assembly required, black	
3	INSULATED FOOD CARRIER	Carlisle Model No. PC300N59 Cateraide™ Food Carrier, end loader, individual tracks, holds (8) combinations of 6", 4" & 2-1/2" deep food pans, or (5) 2-1/2" deep food pans, insulated, stain & scratch-resistant, heat-resistant to 200°F, automatic self-venting system, molded-in handles, stackable, polyethylene, slate blue, NSF	<b>Price to be Submitted Via BidSync</b>
1	PAN CARRIER DOLLY	DL300R03 Cateraide™ Pan Carrier Dolly, platform without handle, holds up to (2) PC300N end loaders or any Cateraide™ top loader, 4" heavy-duty non-marking swivel casters, polyethylene, black, NSF, Made in USA, BPA Free	<b>Price to be Submitted Via BidSync</b>
1	TILTING SKILLET BRAISING PAN, GAS	<p>Vulcan Model No. VG40 Braising Pan, Gas, 40-gallon capacity, 46" wide open base, manual tilt 9" deep stainless steel pan with gallon markings, pouring lip &amp; removable strainer, spring assist cover with drip edge, pan holder, solid state control, includes L faucet bracket, electric ignition, 12" stainless steel legs with adjustable flanged feet, 120,000 BTU, CSA Flame, CSA Star, UL EPH Classified</p> <p>1 year limited parts &amp; labor warranty, standard</p> <p>Natural gas (specify elevation if over 2,000 ft.)</p> <p>120v/60/1-ph, 9.0 amps, cord &amp; plug, standard</p> <p>DBPTYTS WSHDWN DOUBLE Pantry Deck Mount Faucet, with backflow preventer, 16" add-on faucet, washdown hose, wall hook, NSF &amp; Lead Reduction Compliant</p> <p>Removal of old skillet and Installation of new one</p>	<b>Price to be Submitted Via BidSync</b>
1	GAS CONNECTOR HOSE	T&S Brass Model No. HG-4D-48 (T&SHG-4D-48K) Safe-T-Link Gas Connector Hose, 3/4" connection, 48"L, stainless steel braid with extruded coating, (1) quick disconnect, (1) 90° elbow, (1) street "EL"	<b>Price to be Submitted Via BidSync</b>
2	TRUCK, PLATFORM	Douglas Equipment Co. Model No. ATP-3060-1-839-30 X 60 TREADPLATE ALUMINUM PLATFORM TRUCK, 1 REMOVEABLE HANDLE, 2 EACH I389016D AND 2 EACH I388016D 6 X 2" BLACK POLYOLEFIN CASTERS, 10" DECK HEIGHT, 2,800# CAPACITY	<b>Price to be Submitted Via BidSync</b>

1	WATER FOUNTAIN/BOTTLE REFILLING STATION	Global Industrial Model No. 761218 Refrigerated Water Bottle Refilling Station	<b>Price to be Submitted Via BidSync</b>
2	ANTI-FATIGUE FLOOR MAT	Cactus Mat Model No. 5000-R35 VIP Red Cloud Anti-Fatigue Mat, 3' x 5', 3/4" thick, closed-cell nitrile textured rubber with drainage holes, tapered safety edge all sides, grease & slip-resistant, for kitchens, cooklines, bars, prep areas, waitress pick-up, assembly lines, & behind counters, lightweight, red	<b>Price to be Submitted Via BidSync</b>
1	Reach-in Freezer	<p>Turbo Air Model No. M3F47-2-N M3 Freezer, reach-in, two-section, 42.1 cu. ft., exterior LED digital thermometer, door open beep, self-diagnostic monitoring system, hot gas condensate system, smart fuzzy defrost, automatic fan motor delays, door pressure release, LED interior lighting, self-cleaning condenser device, (2) hinged solid doors with recessed handle &amp; locks, (6) PE coated wire shelves, stainless steel front &amp; sides (galvanized steel top, bottom &amp; back), aluminum interior with stainless steel floor, top mount self-contained compressor, R290 Hydrocarbon refrigerant, 2/3 HP, 115v/60/1-ph, 6.3 amps, NEMA 5-15P, ETL-Sanitation, cETLus, ENERGY STAR®</p> <p>year parts &amp; labor warranty, standard</p> <p>Additional 2 year compressor warranty (5 year total), standard</p> <p>Self-cleaning condenser device equipped, standard</p> <p>Caster Set, swivel, locking front wheels, standard</p>	<b>Price to be Submitted Via BidSync</b>
1	COMBI OVEN, GAS	Vulcan Model No. ABC7G-NAT Combi Oven/Steamer, natural gas, boilerless, (7) 18" x 26" full size sheet or (14) 12" x 20" full size hotel pan capacity, (3) knobs with LED displays for temperature, timer & humidity, auto-adjustment of humidity with temperature selection, auto-reversing fan with electronic braking system, cool to touch glass door, flashing door light & audible alert, (4) Grab n Go wire racks, stainless steel interior &	<b>Price to be Submitted Via BidSync</b>

		<p>exterior, 80,000 BTU, 120v/60/1-ph, engineered &amp; assembled in USA, UL EPH Classified, cULus</p> <p>1 year limited parts &amp; labor warranty, standard</p> <p>Filtration System</p> <p>CB30K-SYSTEM Single Hollow Carbon Filter System, with 30,000 gallon capacity, for chlorine &amp; chloramine reduction, sediment, bad tastes &amp; odors, total organic compounds, tannins &amp; trihalomethanes, ANSI/NSF 42 &amp; 53</p> <p>No reverse osmosis system</p> <p>STAND-ABC/SS Stand, open frame, stainless steel, with adjustable feet, includes: spray hose &amp; drip tray</p> <p>Removal/Installation of Combi Oven</p> <p>ABC-CAST Casters, with 2 locking wheels, for use only with STANDABC/SS</p>	
1	GAS CONNECTOR HOSE KIT / ASSEMBLY	T&S Brass Model No. HG-4D-48K Packed 1 kt Safe-T-Link Gas Connector Kit, 3/4" connection, 48"L, stainless steel braid with extruded coating, (1) quick disconnect, (1) street "EL", ball valve, restraining cable adjustable for 3'to 5'	<b>Price to be Submitted Via BidSync</b>
1	REACH-IN REFRIGERATOR	Turbo Air Model No. M3R47-2-N M3 Refrigerator, reach-in, two-section, 42.3 cu. ft. exterior LED digital thermometer, door open beep, self-diagnostic monitoring system, hot gas condensate system, automatic fan motor delays, door pressure release, LED interior lighting, self-cleaning condenser device, (2) hinged solid door with recessed handle & lock, (6) PE coated wire shelves, stainless steel front & sides (galvanized steel top, bottom & back), aluminum interior with stainless steel floor, top mount selfcontained compressor, R290 Hydrocarbon refrigerant, 1/3 HP, 115v/60/1-ph, 2.8 amps, NEMA 5-15P, ETL-Sanitation, cETLus, ENERGY STAR®	<b>Price to be Submitted Via BidSync</b>

		3 year parts & labor warranty, standard	
		Additional 2 year compressor warranty (5 year total), standard	
		Self-cleaning condenser device equipped, standard	
		Caster Set, swivel, locking front wheels, standard	
1	CABINET, COOK/HOLD/OVEN	<p>Cres Cor Model No. 1000-CH-AL-2DE Cook-N-Hold Cabinet, mobile, two compartment, radiant, insulated, capacity (16) 18" x 26" angle pan slides on 3" center, (6) wire grids, solid state electronic control, LED digital display, standard controls, cook &amp; hold cycles, field reversible doors, magnetic latches, antimicrobial latches, stainless steel interior, aluminum exterior, (4) 5" swivel casters (2) braked, cCSAus, CSA</p> <p>208-240v/60/1-ph, 6.0 kW, 30.0 amps, NEMA 6-30P, standard</p> <p>Standard Warranty: 1 year labor, 2 years parts. Lifetime warranty on heating elements excluding labor</p>	Price to be Submitted Via BidSync
1	MOBILE HEATED CABINET	<p>Cres Cor Model No. 1000-HH-SS-2DE Heated Cabinet, Mobile, two compartment, radiant, insulated, topmount heater assembly, (16) 18" x 26" or (16) 12" x 20" pan capacity, removable pan slides on 2-3/4" centers, (2) independent standard solid state electronic controls, LED digital displays, field reversible dutch doors, magnetic anti-microbial latches, stainless steel construction, (4) 5" swivel casters (2) with brakes, CSA-Sanitation, cCSAus</p> <p>Standard Warranty: 1 year labor, 2 years parts warranty</p> <p>120v/60/1-ph, 1.8 kW, 15.0 amp, 6' cord, NEMA 5-20P, standard</p> <p>Right-hand door swing (top &amp; bottom doors),</p>	Price to be Submitted Via BidSync

		standard	
--	--	----------	--

Supplier: **Beltram Edge Tool Supply, Inc.**



City of Pembroke Pines

Attachment B

**NON-COLLUSIVE AFFIDAVIT**

BIDDER is the **Representative**,  
(Owner, Partner, Officer, Representative or Agent)

BIDDER is fully informed respecting the preparation and contents of the attached Bid and of all pertinent circumstances respecting such Bid;

Such Bid is genuine and is not a collusive or sham Bid;

Neither the said BIDDER nor any of its officers, partners, owners, agents, representative, employees or parties in interest, including this affidavit, have in any way colluded, conspired, connived or agreed, directly or indirectly, with any other BIDDER, firm or person to submit a collusive or sham Bid in connection with the Contract for which the attached Bid has been submitted; or to refrain from bidding in connection with such Contract; or have in any manner, directly or indirectly, sought by agreement or collusion, or communications, or conference with any BIDDER, firm, or person to fix the price or prices in the attached Bid or any other BIDDER, or to fix any overhead, profit, or cost element of the Bid Price or the Bid Price of any other BIDDER, or to secure through any collusion conspiracy, connivance, or unlawful agreement any advantage against (Recipient), or any person interested in the proposed Contract;

The price of items quoted in the attached Bid are fair and proper and are not tainted by collusion, conspiracy, connivance, or unlawful agreement on the part of the BIDDER or any other of its agents, representatives, owners, employees or parties in interest, including this affidavit.

Printed Name/Signature **Marty Levenstiem**

Title **VP Purchasing**

Name of Company **IFG INC., DBA BELTRAL EDGE TOOL  
SUPPLY**

Supplier: **Beltram Edge Tool Supply, Inc.**



City of Pembroke Pines

Attachment C

### **PROPOSER'S QUALIFICATIONS STATEMENT**

PROPOSER shall furnish the following information. Failure to comply with this requirement will render Bid non-responsive and shall cause its rejection. Additional sheets shall be attached as required.

PROPOSER'S Name and Principal Address:

**IFG INC., DBA BELTRAM EDGE TOOL SUPPLY  
11101 N 46TH ST  
TAMPA, FL 33617**

PROPOSER'S License Number: **427984**

**(Please attach certificate of status, competency, and/or state registration.)**

Number of years your organization has been in business **48**

State the number of years your firm has been in business under your present business name **48**

State the number of years your firm has been in business in the work specific to this solicitation: **48**

Names and titles of all officers, partners or individuals doing business under trade name:

**IAIN WHYTE,CEO MARGARTE KEARNEY,CFO XIOMARA POLEWASKI,CONTRACTS  
TROY TEMPLETON,EXEC VP DAVID GERSHMAN,SECRETARY JORGE GROSS,CHAIRMAN  
MICHELSA CALDERON,ASSIS SECRETARY TIM TRUJILLO,CONTRACTS**

IF USING A FICTITIOUS NAME, SUBMIT EVIDENCE OF COMPLIANCE WITH FLORIDA FICTITIOUS NAME STATUTE.

Under what former name has your business operated? Include a description of the business. Failure to include such information shall be deemed to be intentional misrepresentation by the City and shall render the proposer non-responsive.

**BELTRAM EDGE TOOL SUPPLY, INC.**

At what address was that business located?

**6800 N FLORIDA AVE  
TAMPA, FL**

Name, address, and telephone number of surety company and agent who will provide the required bonds on this contract:

**FOR COI:  
BEN BROWN INSURANCE AGENCY  
JESSICA BELVITCH  
3731 S TUTTLE AVE  
SARASOTA, FL 34239 (941) 487-3502**

Have you ever failed to complete work awarded to you. If so, when, where and why?

**NO**

Have you personally inspected the proposed WORK and do you have a complete plan for its performance?

**NO**

Will you subcontract any part of this WORK? If so, give details including a list of each sub-contractor(s) that will perform work in excess of ten percent (10%) of the contract amount and the work that will be performed by each subcontractor(s).

**NO**

The foregoing list of subcontractor(s) may not be amended after award of the contract without the prior written approval of the Contract Administrator, whose approval shall not be reasonably withheld.

List and describe all bankruptcy petitions (voluntary or involuntary) which have been filed by or against the Proposer, its parent or subsidiaries or predecessor organizations during the past five (5) years. Include in the description the disposition of each such petition.

**N/A**

List and describe all successful Bond claims made to your surety (ies) during the last five (5) years. The list and descriptions should include claims against the bond of the Proposer and its predecessor organization(s).

**N/A**

List all claims, arbitrations, administrative hearings and lawsuits brought by or against the Proposer or its predecessor organizations(s) during the last (10) years. The list shall include all case names; case, arbitration or hearing identification numbers; the name of the project over which the dispute arose; and a description of the subject matter of the dispute.

**N/A**

List and describe all criminal proceedings or hearings concerning business related offenses in which the Proposer, its principals or officers or predecessor organization(s) were defendants.

**N/A**

Are you an Original provider sales representative distributor, broker, manufacturer other, of the commodities/services proposed upon? If other than the original provider, explain below.

**DISTRIBUTOR**

Have you ever been debarred or suspended from doing business with any governmental agency? If yes, please explain:

**N/A**

Describe the firm's local experience/nature of service with contracts of similar size and complexity, it the previous three (3) years:

**AS A DISTRIBUTOR OF A LARGE VARIETY OF FOODSERVICE EQUIPMENT WE HAVE PROVIDED FOODSERVICE EQUIPMENT TO:**

**FLORIDA DEPT., OF CORRECTIONS**

**HILLSBOURGH COUNTY SCHOOLS**

**ORANGE COUNTY PUBLIC SCHOOLS**

**CITY OF CLEARWATER**

The PROPOSER acknowledges and understands that the information contained in response to this Qualification Statement shall be relied upon by CITY in awarding the contract and such information is warranted by PROPOSER to be true. The discovery of any omission or misstatement that materially affects the PROPOSER's qualifications to perform under the contract shall cause the CITY to reject the Bid, and if after the award, to cancel and terminate the award and/or contract.

**IFG INC., DBA/ BELTRAM EDGE TOOL SUPPLY**  
(Company Name)

**MARTY LEVENSTIEM, VP PURCHASING**  
(Printed Name/Signature)



## **EQUAL BENEFITS CERTIFICATION FORM FOR DOMESTIC PARTNERS AND ALL MARRIED COUPLES**

Except where federal or state law mandates to the contrary, a Contractor awarded a Contract pursuant to a competitive solicitation shall provide benefits to Domestic Partners and spouses of its employees, irrespective of gender, on the same basis as it provides benefits to employees' spouses in traditional marriages.

The Contractor shall provide the City and/or the City Manager or his/her designee, access to its records for the purpose of audits and/or investigations to ascertain compliance with the provisions of this section, and upon request shall provide evidence that the Contractor is in compliance with the provisions of this section upon each new bid, contract renewal, or when the City Manager has received a complaint or has reason to believe the Contractor may not be in compliance with the provisions of this section. Records shall include but not be limited to providing the City and/or the City Manager or his/her designee with certified copies of the Contractor's records pertaining to its benefits policies and its employment policies and practices.

The Contractor must conspicuously make available to all employees and applicants for employment the following statement:

**"During the performance of a contract with the City of Pembroke Pines, Florida, the Contractor will provide Equal Benefits to its employees with spouses, as defined by Section 35.39 of the City's Code of Ordinances, and its employees with Domestic Partners and all Married Couples".**

The posted statement must also include a City contact telephone number and email address which will be provided to each contractor when a covered contract is executed.

### **SECTION 1 DEFINITIONS**

- 1. Benefits** means the following plan, program or policy provided or offered by a contractor to its employees as part of the employer's total compensation package which may include but is not limited to sick leave, bereavement leave, family medical leave, and health benefits.
- 2. Cash Equivalent** mean the amount of money paid to an employee with a domestic partner or spouse in lieu of providing benefits to the employee's domestic partner or spouse. The cash equivalent is equal to the employer's direct expense of providing benefits to an employee for his or her spouse from a traditional marriage.
- 3. Covered Contract** means a contract between the City and a contractor awarded subsequent to the date when this section becomes effective valued at over \$25,000 or the threshold amount required for competitive bids as required in section 35.18(A) of the Procurement Code.
- 4. Domestic Partner** shall mean any two (2) adults of the same or different sex who have registered as domestic partners with a governmental body pursuant to state or local law authorizing such registration, or with an internal registry maintained by the employer of at



least one of the domestic partners. A contractor may institute an internal registry to allow for the provision of equal benefits to employees with domestic partners who do not register their partnerships pursuant to a governmental body authorizing such registration, or who are located in a jurisdiction where no such governmental domestic partnership registry exists. A contractor that institutes such registry shall not impose criteria for registration that are more stringent than those required for domestic partnership registration by the City of Pembroke Pines.

5. **Equal benefits** means the equality of benefits between employees with spouses and/or dependents of spouses and employees with domestic partners and/or dependents of domestic partners, and/or between spouses of employees and/or dependents of spouses and domestic partners of employees and/or dependents of domestic partners.
6. **Spouse** means one member of a married pair legally married under the laws of any state within the United States of America or any other jurisdiction under which such marriage is legally recognized, irrespective of gender.
7. **Traditional marriage** means a marriage between one man and one woman.

## SECTION 2 CERTIFICATION OF CONTRACTOR

The firm providing a response, by virtue of the signature below, certifies that it is aware of the requirements of Section 35.39 "City Contractors providing Equal Benefits for Domestic Partners and all Married Couples" of the City's Code of Ordinances, and certifies the following (**Check only one box below**):

- ☒ **A.** Contractor currently complies with the requirements of this section; or
- ☐ **B.** Contractor will comply with the conditions of this section at the time of contract award; or
- ☐ **C.** Contractor will not comply with the conditions of this section at the time of contract award: or
- ☐ **D.** Contractor does not comply with the conditions of this section because of the following allowable exemption (**Check only one box below**):
- ☐ **1.** The Contractor does not provide benefits to employees' spouses in traditional marriages;
- ☐ **2.** The Contractor provides an employee the cash equivalent of benefits because the Contractor is unable to provide benefits to employees' Domestic Partners or spouses despite making reasonable efforts to provide them. To meet this exception, the Contractor shall provide a notarized affidavit that it has made reasonable efforts to provide such benefits. The affidavit shall state the efforts taken to provide such benefits and the amount of the cash equivalent. Cash equivalent means the amount of money paid to an employee with a Domestic Partner or spouse rather than providing benefits to the employee's Domestic Partner or spouse. The cash equivalent is equal to the employer's direct expense of providing benefits to an employee's spouse;



City of Pembroke Pines

---

☐ 3. The Contractor is a religious organization, association, society, or any non-profit charitable or educational institution or organization operated supervised or controlled by or in conjunction with a religious organization, association, or society;

☐ 4. The Contractor is a governmental agency;

The certification shall be signed by an authorized officer of the Contractor. Failure to provide such certification (by checking the appropriate boxes above along with completing the information below) shall result in a Contractor being deemed non-responsive.

COMPANY NAME: IFG, Inc. dba Beltram Edge Tool Supply

AUTHORIZED OFFICER NAME / SIGNATURE: MARTY LEVENSTER

A handwritten signature in black ink, appearing to read "Marty Levenster", written over a horizontal line.



## E-VERIFY SYSTEM CERTIFICATION STATEMENT (UNDER SECTION 448.095, FLORIDA STATUTES)

1. Definitions:
  - a. **“Contractor”** means a person or entity that has entered or is attempting to enter into a contract with a public employer to provide labor, supplies, or services to such employer in exchange for salary, wages, or other remuneration. “Contractor” includes, but is not limited to, a vendor or consultant.
  - b. **“Subcontractor”** means a person or entity that provides labor, supplies, or services to or for a contractor or another subcontractor in exchange for salary, wages, or other remuneration.
  - c. **“E-Verify system”** means an Internet-based system operated by the United States Department of Homeland Security that allows participating employers to electronically verify the employment eligibility of newly hired employees.
2. Effective January 1, 2021, Contractors, shall register with and use the E-verify system in order to verify the work authorization status of all newly hired employees. Contractor shall register for and utilize the U.S. Department of Homeland Security’s E-Verify System to verify the employment eligibility of:
  - a. All persons employed by a Contractor to perform employment duties within Florida during the term of the contract; and
  - b. All persons (including subvendors/subconsultants/subcontractors) assigned by Contractor to perform work pursuant to the contract with the City of Pembroke Pines. The Contractor acknowledges and agrees that registration and use of the U.S. Department of Homeland Security’s E-Verify System during the term of the contract is a condition of the contract with the City of Pembroke Pines; and
  - c. Should vendor become the successful Contractor awarded for the above-named project, by entering into the contract, the Contractor shall comply with the provisions of Section 448.095, Fla. Stat., “Employment Eligibility,” as amended from time to time. This includes, but is not limited to registration and utilization of the E-Verify System to verify the work authorization status of all newly hired employees. Contractor shall also require all subcontractors to provide an affidavit attesting that the subcontractor does not employ, contract with, or subcontract with, an unauthorized alien. The Contractor shall maintain a copy of such affidavit for the duration of the contract.
3. Contract Termination
  - a. If the City has a good faith belief that a person or entity with which it is contracting has knowingly violated s. 448.09 (1) Fla. Stat., the contract shall be terminated.
  - b. If the City has a good faith belief that a subcontractor knowingly violated s. 448.095 (2), but the Contractor otherwise complied with s. 448.095 (2) Fla. Stat., shall promptly notify the Contractor and order the Contractor to immediately terminate the contract with the subcontractor.
  - c. A contract terminated under subparagraph a) or b) is not a breach of contract and may not be considered as such.
  - d. Any challenge to termination under this provision must be filed in the Circuit Court no later than 20 calendar days after the date of termination.
  - e. If the contract is terminated for a violation of the statute by the Contractor, the Contractor may not be awarded a public contract for a period of 1 year after the date of termination.

IFG, Inc. dba Beltram Edge Tool Supply

COMPANY NAME: \_\_\_\_\_

MARTY LEVENSTIEM

PRINTED NAME / AUTHORIZED SIGNATURE: \_\_\_\_\_

**2020 - 2021** HILLSBOROUGH COUNTY BUSINESS TAX RECEIPT

OCC. CODE

330.000016 RETAIL STORE

**EXPIRES SEPTEMBER 30, 2021**

ACCOUNT NO.

11702

RENEWAL

Receipt Fee 30.00

Hazardous Waste Surcharge 40.00

Law Library Fee 0.00

BUSINESS BELTRAM EDGE TOOL SUPPLY INC  
6726 N FLORIDA AVE  
TAMPA, FL 33604

**2020 - 2021**

NAME BELTRAM EDGE TOOL SUPPLY INC  
MAILING 6726 N FLORIDA AVE  
ADDRESS TAMPA, FL 336046025

Paid 19-648-054848

07/28/2020 70.00

**BUSINESS TAX RECEIPT**

HAS HEREBY PAID A PRIVILEGE TAX TO ENGAGE  
IN BUSINESS, PROFESSION, OR OCCUPATION SPECIFIED HEREON

NANCY C MILLAN, TAX COLLECTOR  
813-635-5200

THIS BECOMES A TAX RECEIPT WHEN VALIDATED.



## LOCAL VENDOR PREFERENCE CERTIFICATION

### SECTION 1 GENERAL TERM

#### LOCAL PREFERENCE

The evaluation of competitive bids is subject to section 35.36 of the City's Procurement Procedures which, except where contrary to federal and state law, or any other funding source requirements, provides that preference be given to local businesses. To satisfy this requirement, the vendor shall affirm in writing its compliance with either of the following objective criteria as of the bid or proposal submission date stated in the solicitation. A local business shall be defined as:

1. "Local Pembroke Pines Vendor" shall mean a business entity which has maintained a permanent place of business with full-time employees within the City limits for a minimum of one (1) year prior to the date of issuance of a bid or proposal solicitation. The permanent place of business may not be a post office box. The business location must actually distribute goods or services from that location. In addition, the business must have a current business tax receipt from the City of Pembroke Pines.

OR;

2. "Local Broward County Vendor" shall mean or business entity which has maintained a permanent place of business with full-time employees within the Broward County limits for a minimum of one (1) year prior to the date of issuance of a bid or proposal solicitation. The permanent place of business may not be a post office box. The business location must actually distribute goods or services from that location. In addition, the business must have a current business tax receipt from the Broward County or the city within Broward County where the business resides.

A preference of five percent (5%) of the total evaluation point, or five percent (5%) of the total price, shall be given to the **Local Pembroke Pines Vendor(s)**; A preference of two and a half percent (2.5%) of the total evaluation point for local, or two and a half percent (2.5%) of the total price, shall be given to the **Local Broward County Vendor(s)**.

#### COMPARISON OF QUALIFICATIONS

The preferences established in no way prohibit the right of the City to compare quality of supplies or services for purchase and to compare qualifications, character, responsibility and fitness of all persons, firms or corporations submitting bids or proposals. Further, the preference established in no way prohibit the right of the city from giving any other preference permitted by law instead of the preferences granted, nor prohibit the city to select the bid or proposal which is the most responsible and in the best interests of the city.

### SECTION 2 AFFIRMATION

#### LOCAL PREFERENCE CERTIFICATION:

- ☐ Place a check mark here only if affirming bidder meets requirements above as a Local Pembroke Pines Vendor. In addition, the business must attach a current business tax receipt from the City of Pembroke Pines along with any previous business tax receipts to indicate that the business entity has maintained a permanent place of business for a minimum of one (1) year.
- ☐ Place a check mark here only if affirming bidder meets requirements above as a Local Broward County Vendor. In addition, the business must attach a current business tax receipt from the Broward County or the city within Broward County where the business resides along with any previous business tax receipts to indicate that the business entity has maintained a permanent place of business for a minimum of one (1) year.

- ☒ Place a check mark here only if affirming bidder does not meet the requirements above as a Local Vendor.

Failure to complete this certification at this time (by checking either of the boxes above) shall render the vendor ineligible for Local Preference. This form must be completed by/for the proposer; the proposer **WILL NOT** qualify for Local Vendor Preference based on their sub-contractors' qualifications.

COMPANY NAME: IFG, Inc. dba Beltram Edge Tool Supply

PRINTED NAME / AUTHORIZED SIGNATURE:

MARY LEVENSTIEM



**SCRUTINIZED COMPANY CERTIFICATION  
PURSUANT TO FLORIDA STATUTE § 287.135.**

I, MARTY LEVENSTIEM, on behalf of IFG, Inc. dba Beltram Edge Tool Supply,  
Print Name and Title Company Name  
certify that IFG, Inc. dba Beltram Edge Tool Supply:  
Company Name

1. Does not participate in a boycott of Israel; and
2. Is not on the Scrutinized Companies that Boycott Israel list; and
3. Is not on the Scrutinized Companies with Activities in Sudan List; and
4. Is not on the Scrutinized Companies with Activities in the Iran Petroleum Energy Sector List; and
5. Has not engaged in business operations in Syria.

Submitting a false certification shall be deemed a material breach of contract. The City shall provide notice, in writing, to the Contractor of the City's determination concerning the false certification. The Contractor shall have ninety (90) days following receipt of the notice to respond in writing and demonstrate that the determination of false certification was made in error. If the Contractor does not demonstrate that the City's determination of false certification was made in error then the City shall have the right to terminate the contract and seek civil remedies pursuant to Florida Statute § 287.135.

Section 287.135, Florida Statutes, prohibits the City from: 1) Contracting with companies for goods or services in any amount if at the time of bidding on, submitting a proposal for, or entering into or renewing a contract if the company is on the Scrutinized Companies that Boycott Israel List, created pursuant to Section 215.4725, F.S. or is engaged in a boycott of Israel; and 2) Contracting with companies, for goods or services over \$1,000,000.00 that are on either the Scrutinized Companies with activities in the Iran Petroleum Energy Sector list, created pursuant to s. 215.473, or are engaged in business operations in Syria.

As the person authorized to sign on behalf of the Contractor, I hereby certify that the company identified above in the section entitled "Contractor Name" does not participate in any boycott of Israel, is not listed on the Scrutinized Companies that Boycott Israel List, is not listed on either the Scrutinized Companies with activities in the Iran Petroleum Energy Sector List, and is not engaged in business operations in Syria. I understand that pursuant to section 287.135, Florida Statutes, the submission of a false certification may subject the company to civil penalties, attorney's fees, and/or costs. I further understand that any contract with the City for goods or services may be terminated at the option of the City if the company is found to have submitted a false certification or has been placed on the Scrutinized Companies with Activities in Sudan list or the Scrutinized Companies with Activities in the Iran Petroleum Energy Sector List.

MARTY LEVENSTIEM

Print Name / Title

*VP Purchasing*  
[Signature]  
Signature

IFG, Inc. dba Beltram Edge Tool Supply

Company Name



**SWORN STATEMENT ON PUBLIC ENTITY CRIMES  
UNDER FLORIDA STATUTES CHAPTER 287.133(3)(a).**

1. This sworn statement is submitted IFG, Inc. dba Beltram Edge Tool Supply  
(name of entity submitting sworn statement)

whose business address is 11101 N 46TH ST, TAMPA, FL 33617

and (if applicable) its Federal Employer Identification Number (FEIN) is

59-1468996. (If the entity has no FEIN, include the Social Security

Number of the individual signing this sworn statement: \_\_\_\_\_.)

2. My name is MARTY LEVENSTIEM and my  
(Please print name of individual signing)

relationship to the entity named above is VP PURCHASING.

3. I understand that a "public entity crime" as defined in Paragraph 287.133(1)(g), Florida Statutes, means a violation of any state or federal law by a person with respect to and directly related to the transaction of business with any public entity or with an agency or political subdivision of any other state or with the United States, including, but not limited to, any bid, proposal, reply, or contract for goods or services, any lease for real property, or any contract for the construction or repair of a public building or public work, involving antitrust, fraud, theft, bribery, collusion, racketeering, conspiracy, or material misrepresentation.
4. I understand that a "convicted" or "conviction" as defined in Paragraph 287.133(1)(b), Florida Statutes, means a finding of guilt or a conviction of a public entity crime, with or without an adjudication of guilt, in any federal or state trial court of record relating to charges brought by indictment or information after July 1, 1989, as a result of a jury verdict, nonjury trial, or entry of a plea of guilty or nolo contendere.
5. I understand that an "affiliate" as defined in Paragraph 287.133(1)(a), Florida Statutes, means:
1. A predecessor or successor of a person convicted of a public entity crime: or
  2. An entity under the control of any natural person who is active in the management of the entity and who has been convicted of a public entity crime. The term "affiliate" includes those officers, directors, executives, partners, shareholders, employees, members, and agents who are active in the management of an affiliate. The Cityship by one person of shares constituting a controlling interest in another person, or a pooling of equipment or income among persons when not for fair market value under an arm's length agreement, shall be a prima facie case that one person controls another person. A person who knowingly enters into a



joint venture with a person who has been convicted of a public entity crime in Florida during the preceding 36 months shall be considered an affiliate.

6. I understand that a "person" as defined in Paragraph 287.133(1)(e), Florida Statutes, means any natural person or any entity organized under the laws of any state or of the United States with the legal power to enter into a binding contract and which bids or applies to bid on contracts let by a public entity, or which otherwise transacts or applies to transact business with a public entity, or which otherwise transacts or applies to transact business with a public entity. The term "person" includes those officers, directors, executives, partners, shareholders, employees, members, and agents who are active in management of an entity.
7. Based on information and belief, the statement which I have marked below is true in relation to the entity submitting this sworn statement. (Please indicate which statement applies.)
- ☒ A) Neither the entity submitting this sworn statement, nor any officers, directors, executives, partners, shareholders, employees, members, or agents who are active in management of the entity, nor any affiliate of the entity have been charged with and convicted of a public entity crime subsequent to July 1, 1989.
- ☐ B) The entity submitting this sworn statement, or one or more of the officers, directors, executives, partners, shareholders, employees, members, or agents who are active in management of the entity, or an affiliate of the entity has been charged with and convicted of a public entity crime subsequent to July 1, 1989, AND (Please indicate which additional statement applies.)
- ☐ B1) There has been a proceeding concerning the conviction before a hearing officer of the State of Florida, Division of Administrative Hearings. The final order entered by the hearing officer did not place the person or affiliate on the convicted vendor list. **(Please attach a copy of the final order.)**
- ☐ B2) The person or affiliate was placed on the convicted vendor list. There has been a subsequent proceeding before a hearing officer of the State of Florida, Division of Administrative Hearings. The final order entered by the hearing officer determined that it was in the public interest to remove the person or affiliate from the convicted vendor list. **(Please attach a copy of the final order.)**
- ☐ B3) The person or affiliate has not been placed on the convicted vendor list. **(Please describe any action taken by or pending with the Department of General Services.)**

MARTY LEVENSTIEM

Bidder's Name

Signature

IFG, Inc. dba Beltram Edge Tool Supply

Company Name

Date

4/19/2021



## VENDOR DRUG-FREE WORKPLACE CERTIFICATION FORM

### SECTION 1 GENERAL TERM

Preference may be given to vendors submitting a certification with their bid/proposal certifying they have a drug-free workplace in accordance with Section 287.087, Florida Statutes. This requirement affects all public entities of the State and becomes effective January 1, 1991. The special condition is as follows:

**IDENTICAL TIE BIDS** - Preference may be given to businesses with drug-free workplace programs. Whenever two or more bids that are equal with respect to price, quality, and service are received by the State or by any political subdivision for the procurement of commodities or contractual services, a bid received from a business that certifies that it has implemented a drugfree workplace program shall be given preference in the award process. Established procedures for processing tie bids will be followed if none of the tied vendors have a drug-free workplace program. In order to have a drug-free workplace program, a business shall:

1. Publish a statement notifying employees that the unlawful manufacture, distribution, dispensing, possession, or use of a controlled substance is prohibited in the workplace and specifying the actions that will be taken against employees for violations of such prohibition.
2. Inform employees about the dangers of drug abuse in the workplace, the business's policy of maintaining a drug-free workplace, any available drug counseling, rehabilitation, and employee assistance programs, and the penalties that may be imposed upon employees for drug abuse violations.
3. Give each employee engaged in providing the commodities or contractual services that are under bid a copy of the statement specified in subsection (1).
4. In the statement specified in subsection (1), notify the employees that, as a condition of working on the commodities or contractual services that are under bid, the employee will abide by the terms of the statement and will notify the employer of any conviction of, or plea of guilty or nolo contendere to, any violation of chapter 893 or of any controlled substance law of the United States or any state, for a violation occurring in the workplace no later than five (5) days after each conviction.
5. Impose a sanction on, or require the satisfactory participation in a drug abuse assistance or rehabilitation program if such is available in the employee's community, by any employee who is so convicted.
6. Make a good faith effort to continue to maintain a drug-free workplace through implementation of this section.

### SECTION 2 AFFIRMATION

☒ Place a check mark here only if affirming bidder **complies fully** with the above requirements for a Drug-Free Workplace.

☐ Place a check mark here only if affirming bidder **does not** meet the requirements for a Drug-Free Workplace.

Failure to complete this certification at this time (by checking either of the boxes above) shall render the vendor ineligible for Drug-Free Workplace Preference. This form must be completed by/for the proposer; the proposer **WILL NOT** qualify for Drug-Free Workplace Preference based on their sub-contractors' qualifications.

IFG, Inc. dba Beltram Edge Tool Supply

Company Name

MARTY LEVENSTIEM

Authorized Signer Name

  
Authorized Signature



(OFFICE USE ONLY) Vendor number:

### Vendor Information Form

Operating Name (Payee)	IFG, Inc. dba Beltram Edge Tool Supply		
Legal Name (as filed with IRS)	IFG, Inc. dba Beltram Edge Tool Supply		
Remit-to Address (For Payments)	11101 N 46TH ST		
	TAMPA, FL 33617		
Remit-to Contact Name:	RHONDA RAY	Title:	TREASURY MANAGER
Email Address:	rray@the-ifg.com		
Phone #:	(813) 985-8870	Fax #	(813) 985-6080
Order-from Address (For purchase orders)	11101 N 46TH ST, TAMPA, FL 33617		
	PURCHASEORDERS@BELTRAM.COM		
Order-from Contact Name:	RITA CROKER	Title:	INSTITUTIONAL SALES COORDINATOR
Email Address:	rcrocker@beltram.com		
Phone #:	(727) 491-5547	Fax #	(813) 985-6080
Return-to Address (For product returns)	11101 N 46TH ST, TAMPA, FL 33617		
Return-to Contact Name	RITA CROKER	Title:	INSTITUTIONAL SALES COORDINATOR
Email Address:	rcrocker@beltram.com		
Phone #:	(727) 491-5547	Fax #	(813) 985-6080
Payment Terms:	N30 DAYS		

Type of Business (please check one and provide Federal Tax identification or social security Number)

☒ Corporation

Federal ID Number: 59-1468996

☐ Sole Proprietorship/Individual

Social Security No.:

☐ Partnership

☐ Health Care Service Provider

☐ LLC – C (C corporation) – S (S corporation) – P (partnership)

☐ Other (Specify):

Name & Title of Applicant MARTY LEVENSTIEM, VP PURCHASING

Signature of Applicant

Date

4/19/2021



## VETERAN OWNED SMALL BUSINESS (VOSB) PREFERENCE CERTIFICATION

### SECTION 1 GENERAL TERM

#### VETERAN OWNED SMALL BUSINESS (VOSB) PREFERENCE

The evaluation of competitive bids is subject to section 35.37 of the City's Procurement Procedures which, except where contrary to federal and state law, or any other funding source requirements, provides that preference be given to veteran owned small businesses. To satisfy this requirement, the vendor shall affirm in writing its compliance with the following objective criteria as of the bid or proposal submission date stated in the solicitation. A veteran owned small business shall be defined as:

1. "Veteran Owned Small Business" shall mean a business entity which has received a "Determination Letter" from the United States Department of Veteran Affairs Center for Verification and Evaluation notifying the business that they have been approved as a Veteran Owned Small Business (VOSB).

A preference of two and a half percent (2.5%) of the total evaluation point, or two and a half percent (2.5%) of the total price, shall be given to the **Veteran Owned Small Business (VOSB)**. This shall mean that if a **VOSB** submits a bid/quote that is within 2.5% of the lowest price submitted by any vendor, the **VOSB** shall have an option to submit another bid which is at least 1% lower than the lowest responsive bid/quote. If the **VOSB** submits a bid which is at least 1% lower than that lowest responsive bid/quote, then the award will go to the **VOSB**. If not, the award will be made to the vendor that submits the lowest responsive bid/quote. If the lowest responsive and responsible bidder is a "**Local Pembroke Pines Vendor**" (**LPPV**) or a "**Local Broward County Vendor**" (**LBCV**) as established in Section 35.36 of the City's Code of Ordinances, entitled "Local Vendor Preference", then the award will be made to that vendor and no other bidders will be given an opportunity to submit additional bids as described herein.

If there is a **LPPV**, a **LBCV**, and a **VOSB** participating in the same bid solicitation and all three vendors qualify to submit a second bid, the **LPPV** will be given first option. If the **LPPV** cannot beat the lowest bid received by at least 1%, an opportunity will be given to the **LBCV**. If the **LBCV** cannot beat the lowest bid by at least 1%, an opportunity will be given to the **VOSB**. If the **VOSB** cannot beat the lowest bid by at least 1%, then the bid will be awarded to the lowest bidder.

If multiple **VOSBs** submit bids/quotes which are within 2.5% of the lowest bid/quote and there are no **LPPV** or **LBCV** as described in Section 35.36 of the City's Code of Ordinance, entitled "Local Vendor Preference", then all **VOSBs** will be asked to submit a **Best and Final Offer (BAFO)**. The award will be made to the **VOSB** submitting the lowest **BAFO** providing that that **BAFO** is at least 1% lower than the lowest bid/quote received in the original solicitation. If no **VOSB** can beat the lowest bid/quote by at least 1%, then the award will be made to the lowest responsive bidder.

#### COMPARISON OF QUALIFICATIONS

The preferences established in no way prohibit the right of the City to compare quality of supplies or services for purchase and to compare qualifications, character, responsibility and fitness of all persons, firms or corporations submitting bids or proposals. Further, the preference established in no way prohibit the right of the city from giving any other preference permitted by law instead of the preferences granted, nor prohibit the city to select the bid or proposal which is the most responsible and in the best interests of the city.

### SECTION 2 AFFIRMATION

#### VETERAN OWNED SMALL BUSINESS (VOSB) PREFERENCE CERTIFICATION:

☐ Place a check mark here only if affirming bidder meets requirements above as a Veteran Owned Small Business. In addition, the bidder must attach the "Determination Letter" from the U.S. Dept. of Veteran Affairs Center.

☒ Place a check mark here only if affirming bidder does not meet the requirements above as a VOSB.

Failure to complete this certification at this time (by checking either of the boxes above) shall render the vendor ineligible for VOSB Preference. This form must be completed by/for the proposer; the proposer **WILL NOT** qualify for VOSB Preference based on their sub-contractors' qualifications.

COMPANY NAME: IFG, Inc. dba Beltram Edge Tool Supply

PRINTED NAME / AUTHORIZED SIGNATURE: \_\_\_\_\_

*IMPATY LEUKSTIEN*

# Request for Taxpayer Identification Number and Certification

Give Form to the  
requester. Do not  
send to the IRS.

► Go to [www.irs.gov/FormW9](http://www.irs.gov/FormW9) for instructions and the latest information.

Print or type.  
See Specific Instructions on page 3.

1 Name (as shown on your income tax return). Name is required on this line; do not leave this line blank.

**BELTRAM EDGE TOOL SUPPLY, INC.**

2 Business name/disregarded entity name, if different from above

3 Check appropriate box for federal tax classification of the person whose name is entered on line 1. Check only **one** of the following seven boxes.

- ☐ Individual/sole proprietor or single-member LLC
- ☒ C Corporation ☐ S Corporation ☐ Partnership ☐ Trust/estate
- ☐ Limited liability company. Enter the tax classification (C=C corporation, S=S corporation, P=Partnership) ► \_\_\_\_\_
- Note:** Check the appropriate box in the line above for the tax classification of the single-member owner. Do not check LLC if the LLC is classified as a single-member LLC that is disregarded from the owner unless the owner of the LLC is another LLC that is **not** disregarded from the owner for U.S. federal tax purposes. Otherwise, a single-member LLC that is disregarded from the owner should check the appropriate box for the tax classification of its owner.
- ☐ Other (see instructions) ► \_\_\_\_\_

4 Exemptions (codes apply only to certain entities, not individuals; see instructions on page 3):

Exempt payee code (if any) \_\_\_\_\_

Exemption from FATCA reporting code (if any) \_\_\_\_\_

(Applies to accounts maintained outside the U.S.)

5 Address (number, street, and apt. or suite no.) See instructions.

**11101 N 46TH STREET AND (6800 N FLORIDA AVE, TAMPA FL 33604)**

6 City, state, and ZIP code

**TAMPA, FL 33617**

7 List account number(s) here (optional)

Requester's name and address (optional)

## Part I Taxpayer Identification Number (TIN)

Enter your TIN in the appropriate box. The TIN provided must match the name given on line 1 to avoid backup withholding. For individuals, this is generally your social security number (SSN). However, for a resident alien, sole proprietor, or disregarded entity, see the instructions for Part I, later. For other entities, it is your employer identification number (EIN). If you do not have a number, see *How to get a TIN*, later.

**Note:** If the account is in more than one name, see the instructions for line 1. Also see *What Name and Number To Give the Requester* for guidelines on whose number to enter.

Social security number

\_\_\_\_ - \_\_\_\_ - \_\_\_\_

or

Employer identification number

5 9 - 1 4 6 8 9 9 6

## Part II Certification

Under penalties of perjury, I certify that:

- The number shown on this form is my correct taxpayer identification number (or I am waiting for a number to be issued to me); and
- I am not subject to backup withholding because: (a) I am exempt from backup withholding, or (b) I have not been notified by the Internal Revenue Service (IRS) that I am subject to backup withholding as a result of a failure to report all interest or dividends, or (c) the IRS has notified me that I am no longer subject to backup withholding; and
- I am a U.S. citizen or other U.S. person (defined below); and
- The FATCA code(s) entered on this form (if any) indicating that I am exempt from FATCA reporting is correct.

**Certification instructions.** You must cross out item 2 above if you have been notified by the IRS that you are currently subject to backup withholding because you have failed to report all interest and dividends on your tax return. For real estate transactions, item 2 does not apply. For mortgage interest paid, acquisition or abandonment of secured property, cancellation of debt, contributions to an individual retirement arrangement (IRA), and generally, payments other than interest and dividends, you are not required to sign the certification, but you must provide your correct TIN. See the instructions for Part II, later.

Sign  
Here

Signature of  
U.S. person ►

*Rhonda Ray*

Date ►

*1-6-2021*

## General Instructions

Section references are to the Internal Revenue Code unless otherwise noted.

**Future developments.** For the latest information about developments related to Form W-9 and its instructions, such as legislation enacted after they were published, go to [www.irs.gov/FormW9](http://www.irs.gov/FormW9).

## Purpose of Form

An individual or entity (Form W-9 requester) who is required to file an information return with the IRS must obtain your correct taxpayer identification number (TIN) which may be your social security number (SSN), individual taxpayer identification number (ITIN), adoption taxpayer identification number (ATIN), or employer identification number (EIN), to report on an information return the amount paid to you, or other amount reportable on an information return. Examples of information returns include, but are not limited to, the following.

- Form 1099-INT (interest earned or paid)

- Form 1099-DIV (dividends, including those from stocks or mutual funds)
- Form 1099-MISC (various types of income, prizes, awards, or gross proceeds)
- Form 1099-B (stock or mutual fund sales and certain other transactions by brokers)
- Form 1099-S (proceeds from real estate transactions)
- Form 1099-K (merchant card and third party network transactions)
- Form 1098 (home mortgage interest), 1098-E (student loan interest), 1098-T (tuition)
- Form 1099-C (canceled debt)
- Form 1099-A (acquisition or abandonment of secured property)

Use Form W-9 only if you are a U.S. person (including a resident alien), to provide your correct TIN.

If you do not return Form W-9 to the requester with a TIN, you might be subject to backup withholding. See *What is backup withholding*, later.